



Stationary Side Crib Assembly Instructions
IMPORTANT - RETAIN FOR FUTURE REFERENCE - READ CAREFULLY

SSC 1400 Tribute Crib

Your crib is certified to meet all safety guidelines established by ASTM International and the CPSC-Consumer Product Safety Commission. Call us if you have any questions, 800-659-7297.



WARNING: FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

- When child is able to pull to a standing position, set the mattress to the lowest position and remove bumper pads, large toys and other objects that could serve as steps for climbing out.
- When a child is able to climb out or reaches the height of 35 in. (90 cm), the crib shall no longer be used.
- **DO NOT** place a crib near a window where cords from blinds or drapes may strangle a child.
- To reduce the risk of SIDS, pediatricians recommend healthy infants be placed on their backs to sleep, unless otherwise advised by your physician.
- To help prevent strangulation tighten all fasteners. A child can trap parts of the body or clothing on loose fasteners.
- **Strings can cause strangulation!** Do not place items with a string around a child's neck, such as hood strings or pacifier cords. Do not suspend strings over a crib or attach strings to toys.
- Before each usage or assembly, inspect crib for damaged hardware, loose joints, missing parts or sharp edges. **DO NOT** use crib if any parts are missing or broken. Contact your dealer or write to Stanley Furniture, 200 North Hamilton St, No. 200, High Point, NC 27260 for replacement parts and instructional literature if needed.
- **DO NOT** substitute parts. Use only bolts or parts supplied by manufacturer or parts of comparable quality and equal dimensions. Do not allow ends of bolts or sharp edges to be exposed.
- Follow warnings on all products in a crib.
- If refinishing, use a non-toxic finish specified for children's products.
- Infants can suffocate on soft bedding. Never add a pillow, comforter or padding. Never place additional padding under an infant.
- Infants can suffocate in gaps between crib sides and a mattress that is too small.
- Never use plastic shipping bags or other plastic film as mattress covers because they can cause suffocation.
- Do not allow child to crawl or play underneath crib.
- Use caution when a vaporizer is in use. Always aim the vapor steam away from the crib as well as away from any other wood furniture item.
- The crib must be fully assembled prior to use.
- Read all instructions before assembling crib. **KEEP INSTRUCTIONS FOR FUTURE USE.**

- **CAUTION:** Any mattress used in this crib must be at least 27-1/4" by 51-5/8" with a thickness of no less than 4 inches and not exceeding 6 inches.

When Converting to a Toddler Bed:


- **NEVER** use bed with children under 15 months of age.
- The maximum weight of the intended user shall not be greater than 50 lb (22.7kg).

Identifying the Parts

The crib illustrations in these instructions are generic in nature. The crib you have purchased may not look like the ones illustrated; however, they all assemble in the same manner.




2 Crib Ends

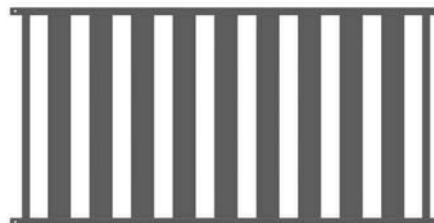

Mattress Platform



2 Base Rails

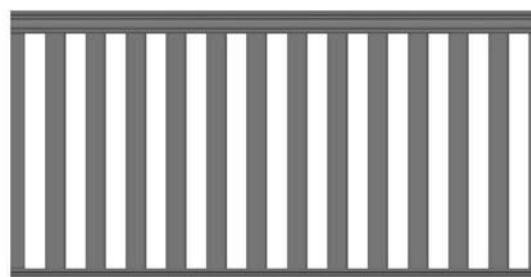

2 Crib Sides


Identifying the Hardware

Identify the hardware included using the illustrations below

4 Connector Bolts
2 3/8" (1/4" x 20 thread)



16 Connector Bolts
2" (1/4 x 20 thread)

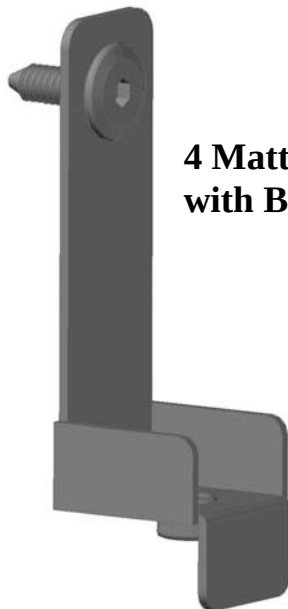

4 Mattress Brackets
with Bolts



2 Allen Wrenches



6 Locater Pins

Crib Assembly

NOTE: Read all instructions before assembling crib. KEEP INSTRUCTIONS FOR FUTURE REFERENCE.

Attached to the mattress platform is a sleeve to store the instruction booklet. After assembly is complete, return this instruction booklet to the sleeve for future reference.

This crib conforms to the ASTM International and the CPSC-Consumer Product Safety Commission guidelines for product safety. Please adhere to the guidelines in this booklet for assembly, operation and maintenance.

Note the recommendations below:

- Power tools are not recommended for assembly.
- Give yourself plenty of room to work.
- Due to the size of this bed, it must be assembled in the space it will occupy.
- The assembly will take two people to complete.
- Layout all the hardware and make sure that the proper length bolts are used in the designated areas.
- Do not substitute hardware. If an item is missing or damaged contact Stanley Furniture Company immediately for replacement. Inspect all component parts and hardware prior to beginning the assembly process.
- Make sure all fasteners are tight.
- Above all, take your time and read the instructions carefully.

Tools required for Assembly:

- Allen Wrenches (provided)

This Crib is equipped with these additional features:

Bolt Retainer Sleeve—The Retainer Sleeves are located where Connector Bolts are used to assemble the crib. It is designed to prevent loss of the Connector Bolts after crib is disassembled. The Bolt Retainer Sleeves are permanently installed at the factory.

Attaching the Mattress Platform Brackets

Step 1:

- Locate the (4) Mattress Platform Brackets with attached assembly bolts as shown in Fig. 1. Determine the high or low position of the mattress foundation (Fig. 3) and attach the brackets on both the left and right end section in the same height location. (This is very important to keep the foundation level and your child safe).
- Attach the (4) brackets and tighten bolts using the wrench provided. See Figure 2.
- Make sure the brackets are straight and perpendicular to the crib uprights.
- When child is able to pull to a standing position, set the mattress platform to the lowest position and remove bumper pads, large toys and other objects that could serve as steps for climbing out.


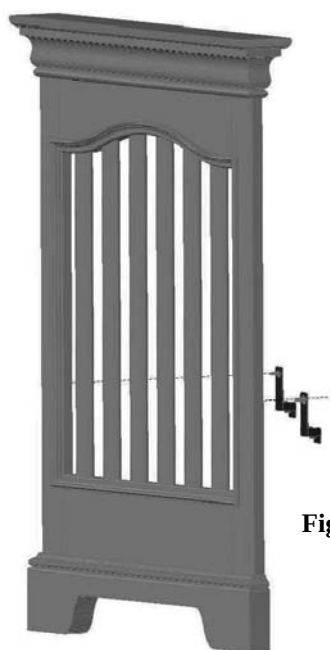


Figure 1. End Assemblies

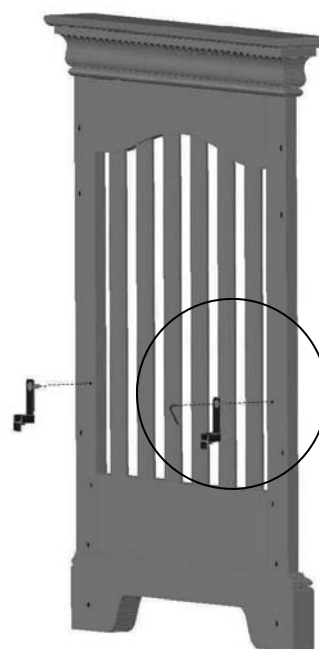

See
Figure 2.

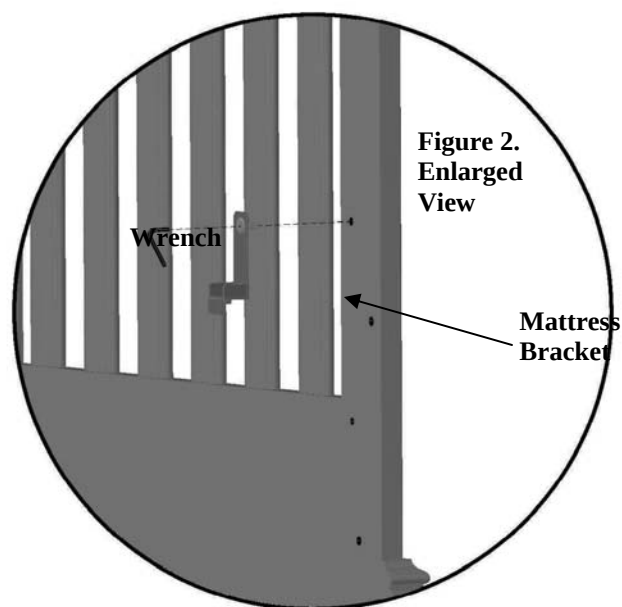


Figure 2.
Enlarged
View

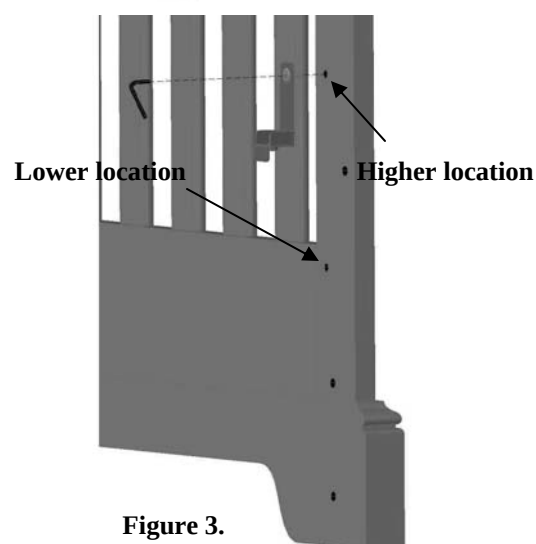


Figure 3.

Attaching the Crib Base Rail

Step 2:

- As shown in Fig. 4, align the holes in (1) of the Base Rails with the holes in the Crib Ends and insert the connector bolts from the inside of the Base Rail.
- Loosely attach the Base Rail to the Crib Ends using (4) 2" connector bolts. Make sure the Brackets attached to the Base Rail are facing the inside of the Crib.
- Secure the connector bolts just enough to hold the Base Rail in place using the provided wrench.


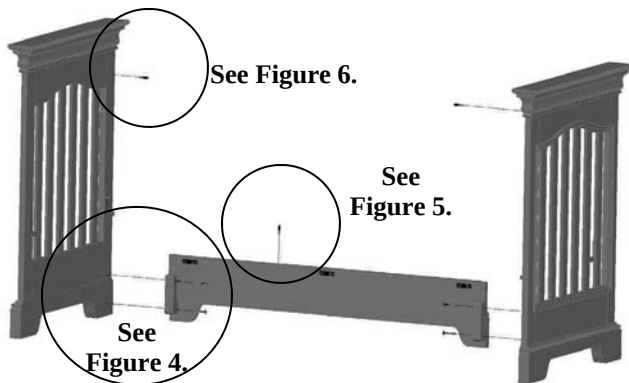


Figure 4.
Enlarged
View

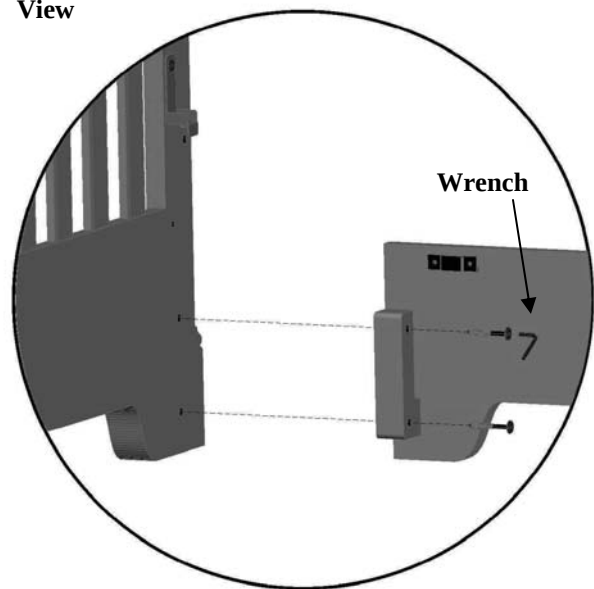

- Install (3) Locator Pins, (1) in the Base Rail and (1) in each Crib End.
- Locate the threaded insert in the top edge of the Base Rail and insert a Locator Pin. Tighten by hand. See Fig. 5.
- Locate the upper threaded insert in each of the Crib Ends and insert a Locator Pin. See Fig. 6. (Make sure to insert the Locator Pins on the same side of the Crib Ends as the attached Base Rail.)

Figure 5.
Enlarged
View


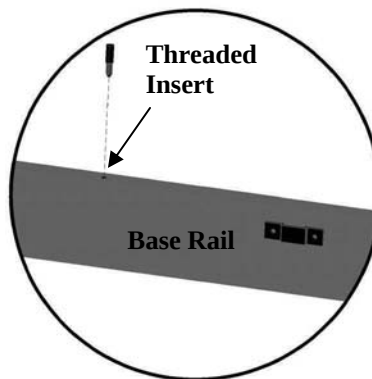


Figure 6.
Enlarged
View

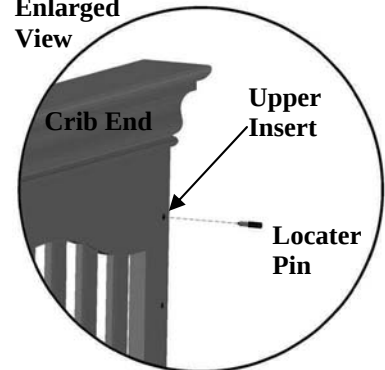

Attaching the Crib Side

Step 3:

- Position (1) Crib Side, as shown in Figure 7, by aligning the Locator Pin on the top edge of the Base Rail with the hole in the bottom rail of the Crib Side.
- Gently spread the top of the Crib Ends to allow the Locator Pins in the Crib Ends to engage the holes in the ends of the Crib Side top rail. See Figure 8.
- Insert (4) 2" Connector Bolts into the holes that are in the end uprights of the Crib Side. Loosely attach the Crib Side to the Crib Ends using the provided wrench. Do not tighten the bolts at this time. See Figure 9.
- Tighten the connector bolts that attach the Base Rail to the Crib Ends at this time with the provided wrench. See Fig. 4 on Page 7.
- Attach the remaining Base Rail and Locator Pins following Step 2 on page 7. Do not completely tighten Base Rail bolts at this time.
- Figure 10 is how your Crib should look at this point.

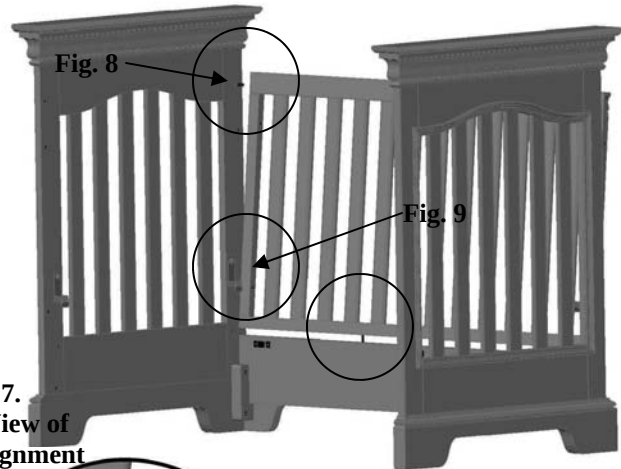


Figure 7.
Enlarged View of
Crib Side alignment

Figure 7.
Align Crib Side

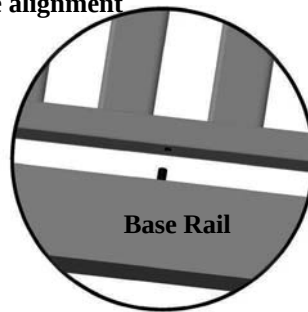


Figure 8.
Enlarged View of
Crib End - Crib Side
alignment

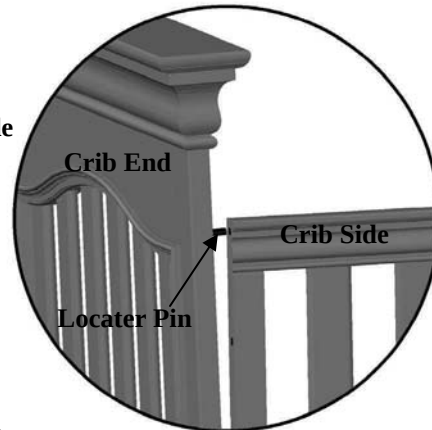


Figure 9.
Enlarged View


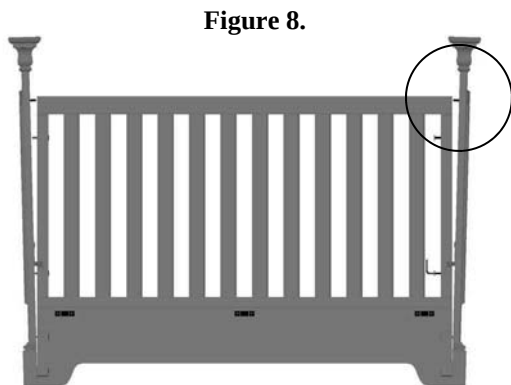


Figure 8.

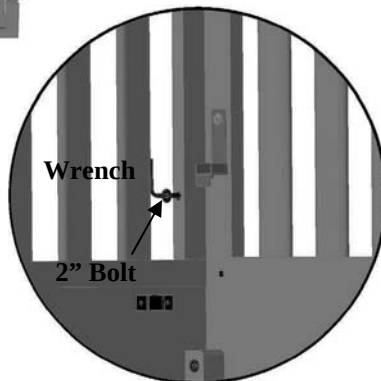

See
Figure 9

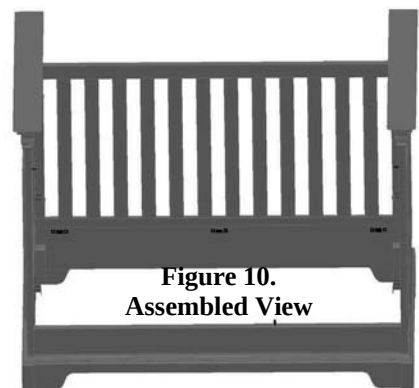


Figure 10.
Assembled View

Attaching the Mattress Platform

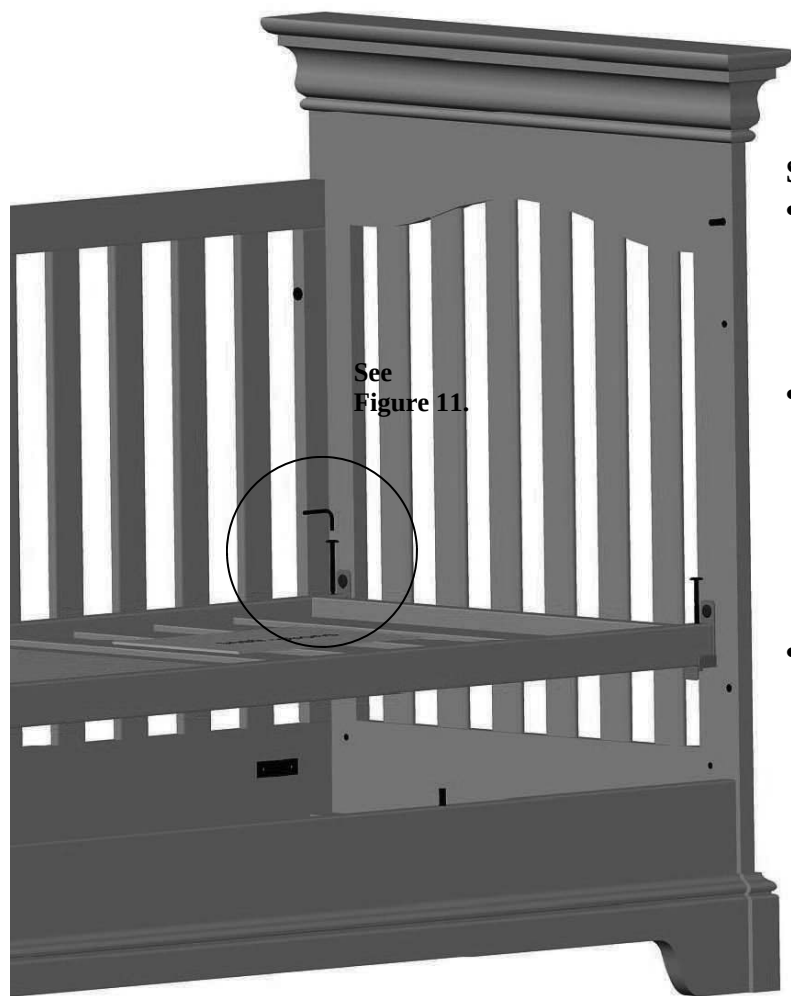


Figure 11.
Enlarged view of bolt attachment

Step 4:

- Place the Mattress Platform into the support brackets. (Before inserting bolts, make sure the instruction holder and the warning label are facing up and readable as shown in Fig 12.
- After the Mattress Platform is in place, use the (4) 2 3/8" connector bolts to attach the Mattress Platform to the support brackets. Insert each bolt in place and start the bolt into the bracket threads. See Figure 11. Do not completely tighten the Mattress Platform bolts at this time.
- Fig. 12 is how your crib should look with Warning labels facing the front of the crib.



Figure 12.
Assembled with mattress platform



Attaching the Opposite Crib Side And Base Rail



Figure 13.
Remaining Assembly

Step 5:

- Attach the remaining Crib Side. See Fig. 13.
- Refer to Step 3 on pages 8.
- Tighten all Crib Side, Mattress Platform, and Base Rail bolts at this time.
- After the Crib is assembled re-check **all assembly bolts** and make sure that each is securely tightened using the provided wrench.



Figure 14.
Completed
Assembly

Final Step in Crib Assembly



Step 6: (The final and most important) Checklist.

- Inspect the crib once again to assure that all bolts are tight and that no hardware is missing. (if you have missing hardware, contact Stanley Furniture immediately for replacement and do not use the crib until the new hardware arrives).
- Do not place the crib near a window where the child may have access to window coverings, cords or draperies as these articles pose a strangulation hazard.
- Replace the instructions in the holder provided. **KEEP THE INSTRUCTIONS WITH THE CRIB.**
- Install the crib mattress.
- Follow all the warnings on the use of this crib and all products in the crib.

- **CAUTION:** Any mattress used in this crib must be at least 27-1/4" by 51-5/8" with a thickness of no less than 4 inches and not exceeding 6 inches.

Cleaning:

Mix together a mild solution of gentle dishwashing liquid and water, apply to the crib surface using a soft clean cloth lightly dampened in the solution. Rinse with clear water again using a soft clean cloth, then dry all surfaces thoroughly with a dry cloth. NO ABRASIVE CLEANERS, SCOURING PADS, STEEL WOOL OR COURSE RAGS SHOULD BE USED TO CLEAN THIS FINE FURNITURE.

Storage:

A permanent storage pouch is attached to the mattress platform for the storage of the assembly instructions. After completing the assembly process, you are advised to read and be aware of all WARNINGS, CAUTIONS, CLEANING, STORAGE, USE AND MAINTENANCE notices contained in these instructions. Do not place excess hardware in the storage pouch as it could present a danger to a child if retrieved and could also damage the mattress. When storing the crib, use CAUTION as temperature changes and humidity could be harmful to the crib. It is recommended that the crib be stored in a temperature controlled environment.

Periodic Maintenance:

1. Periodically check to make sure all bolts and connections are fastened securely.
2. If you are missing a part or need a replacement part, do not substitute parts. Ask your dealer for replacement parts or contact Customer Service at (800) 659-7297.
3. The crib allows for 2 mattress heights. Move to the low position when the child can pull up to a standing position. When the child reaches a height of 35" or can climb out of the crib you should place the child in a youth or regular bed.
4. Save these instructions in the event you disassemble the crib and need to reassemble it. These instructions will also be useful in identifying replacement parts if needed at a future date.

Lowering the Mattress Platform

Steps to lower the mattress:

- Remove the mattress from the crib.
- Loosen the (4) bolts attaching the front Base Rail. You may have to position the Crib on its side for easier access to the Side Rail bolts. See Figure 15.
- If the Crib is on its side return it to an upright position. Loosen the (4) bolts attaching the front Crib Side. Note: Bolts will stay with Crib Side. See Figure 16.
- Gently spread the top of the Crib Ends to allow the Locator Pins in the Crib Ends to disengage the holes in the ends of the Crib Side top rail. Lift up and remove the Crib Side. See Figure 17.
- Loosen the (4) bolts attaching the Mattress Platform and remove the platform from the crib. Note: Bolts will stay attached to Mattress Platform. See Figure 18.
- Remove the platform brackets and place in the lower position. See Figure 19.
- Refer to Step 4 on Page 9 to reassemble the crib.
- Check and securely tighten all assembly bolts with the provided wrench.

Figure 15.

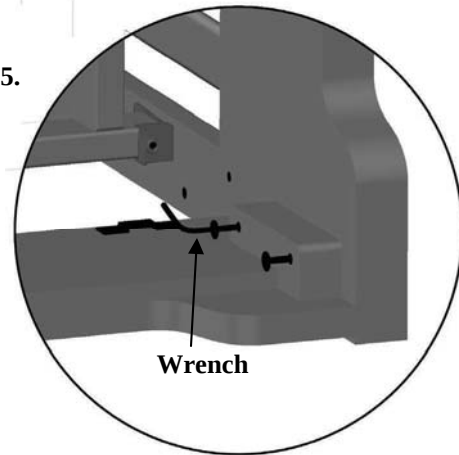


Figure 16.

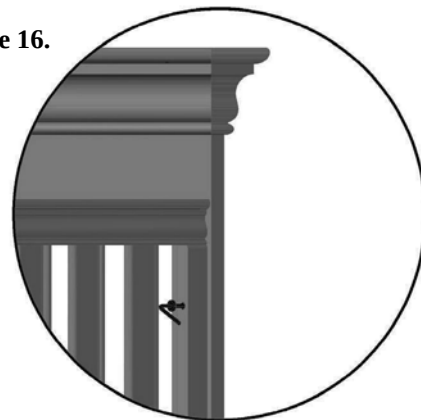


Figure 17.

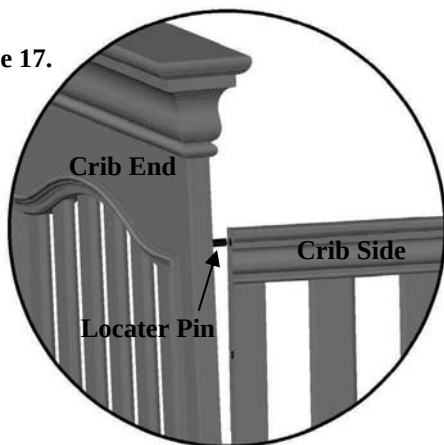


Figure 18.

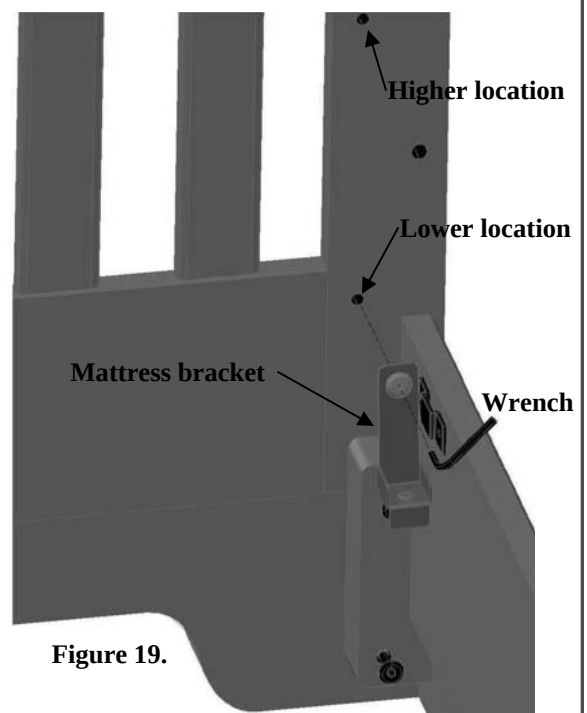


Figure 19.

Converting Your Crib to a Daybed

Steps to Convert Crib to a Daybed:

- When converting to a Daybed the Mattress Platform must be in the lower position.
- Follow the instructions on page 13 for lowering the Mattress Platform. Do not reattach the Crib Side.
- Remove the (3) exposed Locator Pins from the Crib Ends and the Base Rail.
- Store the Locator Pins for future assembly of the crib. **Do not place excess hardware in the storage pouch as it could present a danger to a child if retrieved and could also damage the mattress.**



Accessories and Options

Toddler Bed Conversion Kit item STK-3435 is available as an option to convert the Stationary Side Crib to a toddler bed. Contact your youngAmerica dealer to purchase this item.



Stanley

Furniture

Young America
Stanley Furniture Company
200 North Hamilton Street
High Point, NC 27260

For questions and parts, contact your Young America retailer or our Customer
Service Center: 800-659-7297 Mon-Fri, 8am-8pm, Saturday 9am-3pm EST
www.youngamerica.com