
## Here is what comes in your box:

We recommend that you pull everything out of the box and lay it out. We have grouped the drawn components below with the hardware you'll need for those parts. The screws below are drawn to scale to make it easier to identify what piece of hardware is needed to install each component.

## **Hunter Pro Tip:**



Do not discard the hardware bags or mix parts from different bags. Make note of the symbol printed on each hardware bag. The symbols can be used to identify the appropriate hardware for each step.

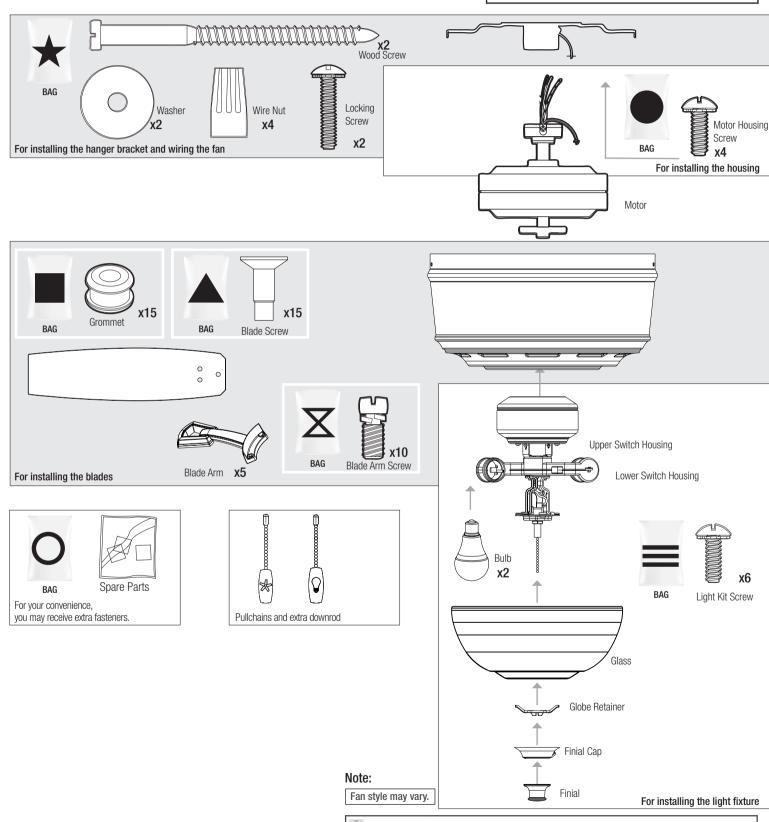


Find a part that is missing or damaged?

Don't take it back to the store. Let us make it right. Visit us at HunterFan.com or call us at 1.888.830.1326.


## **Choosing the Right Installation Location**

You probably bought this fan with a location in mind. Let's check below to make sure it is a good fit.

## Check the room dimensions:



## Check the outlet box:





## **Installing the Ceiling Bracket**

You have two options for installation. Pick which one works best for your location.




## Do this first!



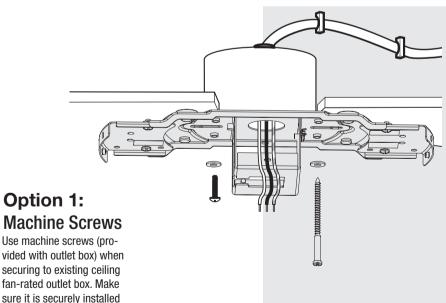

## Option 2: Wood Screws

Use wood screws (included) when securing to support structure with approved electrical outlet box. Drill 9/64" pilot holes in support structure to aid in securing ceiling bracket with hardware found in the \*\psi\$ hardware bag.

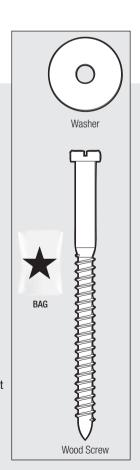

#### **Hunter Pro Tip:**

and is acceptable for fan

or less.

support of 31.8 kg (70 lbs)

The machine screws are the ones that came with your outlet box.

3

Ceiling Bracket Hanging Fan


Wiring


Motor Housing

Blades

Light

## Hanging the Fan

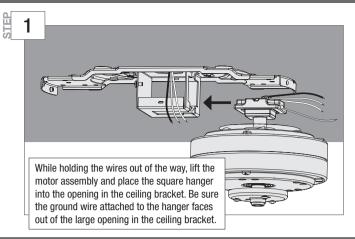

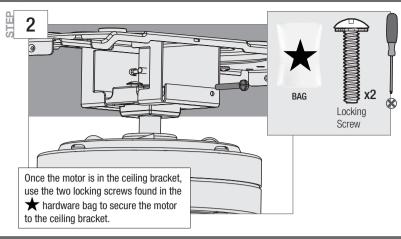

## Wiring the Fan

## We know wiring is hard. Let's make it easier.

Follow these steps to get your fan wired quickly and safely. Follow the route below that best matches your wall switch setup. If you are unfamiliar with wiring or uncomfortable doing it yourself, please contact a qualified electrician.


# Have a single switch? Follow these steps:


B

#### **Hunter Pro Tip:**

#### Here is how to connect the wires:


Push the bare metal ends of the wires together and slide a wire nut over them. Then, twist the wire nut clockwise until tight. Give it a gentle pull to make sure none of the wires are loose.

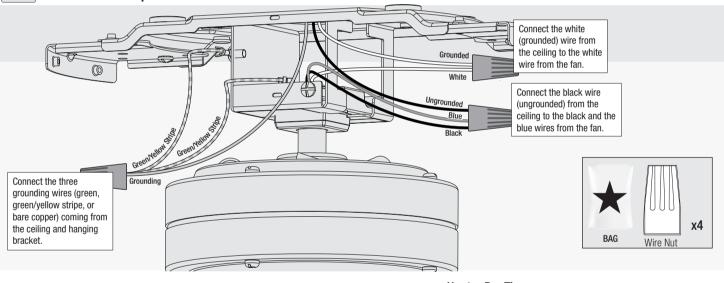




## **Hunter Pro Tip:**


Turn the wires upward and push them carefully back through the hanger bracket into the outlet box. Make sure that the wires are still attached to the wire nuts.

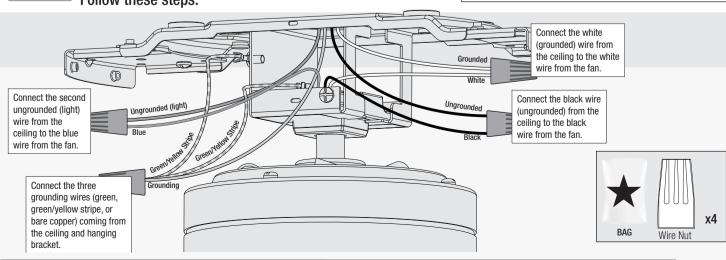



Ceiling Bracket Hanging Fan Wiring Motor Housing Blades Light

## **Installing the Motor Housing**

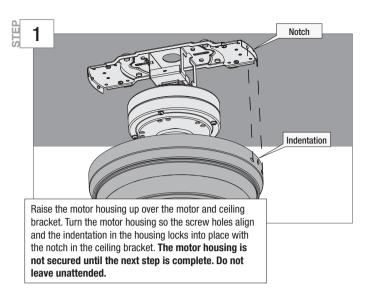

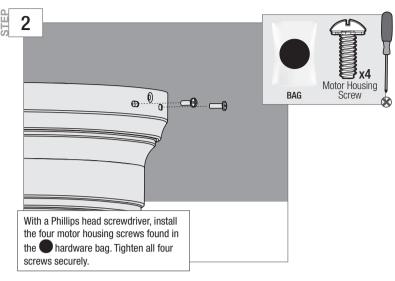


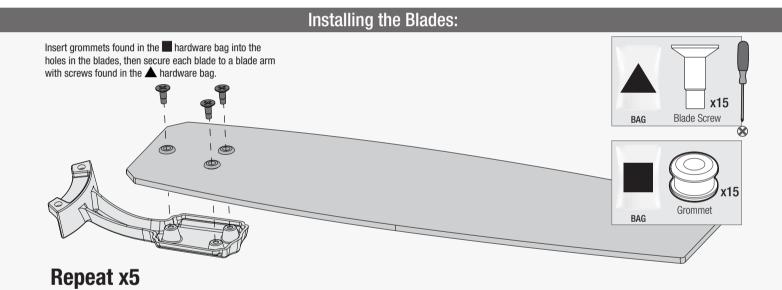


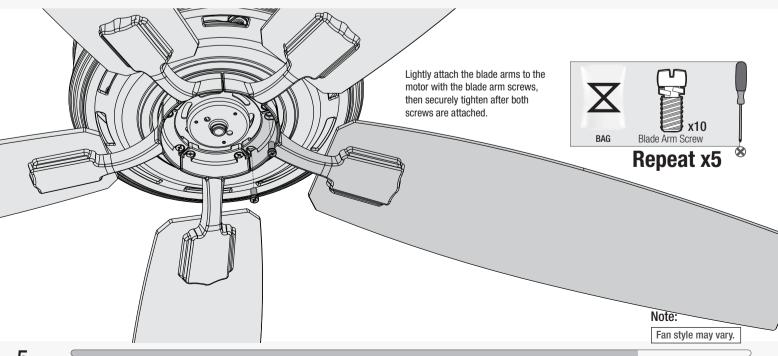


Ceiling Bracket Hanging Fan Wiring Motor Housing Blades Light

## Assembling the Light






Feed the wire plug through the center hole of the upper switch housing, then wrap keyhole slots around the screws and twist counterclockwise.




## WARNING


**FAN FALL HAZARD** Make sure all three screws are tight to secure the upper switch housing to the mounting plate.



Connect the plugs from the upper and lower switch housings. Make sure to line up the colored markings on the connectors.




Partially install two of the light kit screws found in the hardware bag. Align the notches in the sides of the lower switch housing with the screws on the upper switch housing. Twist the lower switch housing clockwise to lock into place.



## WARNING

**FAN FALL HAZARD** 

Make sure all three screws are tight to secure the lower switch housing to the upper switch housing

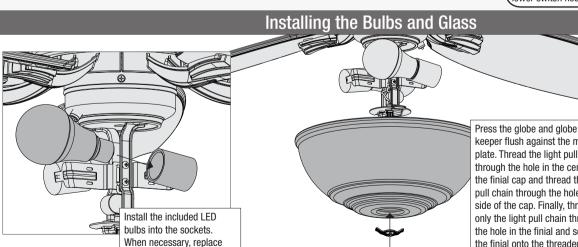

keeper flush against the metal plate. Thread the light pull chain through the hole in the center of the finial cap and thread the fan pull chain through the hole in the side of the cap. Finally, thread only the light pull chain through the hole in the finial and screw the finial onto the threaded rod.



## **Hunter Pro Tip:**

Want to install your fan without a light kit? Go to www.HunterFan.com/FAQs and click "How do I install my fan without the light kit?"

with bulbs of same wattage.

Repeat x2


#### Note:


Fan style may vary.



To prevent SERIOUS INJURY or DEATH, make sure that glass is properly secured.

Ceiling Bracket Hanging Fan Wiring Motor Housing Blades Light

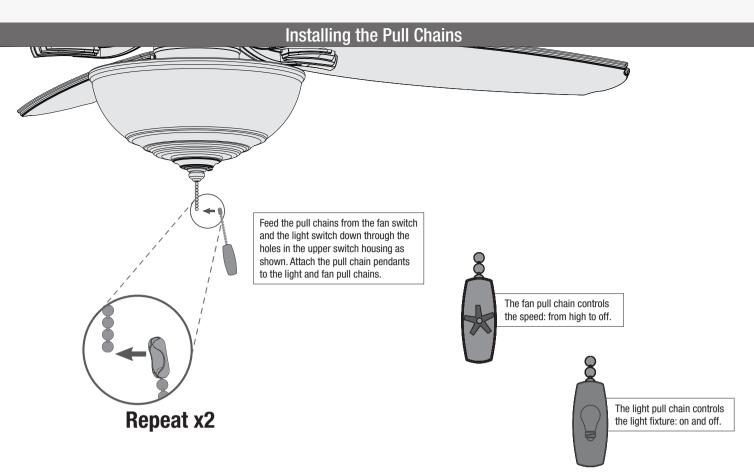

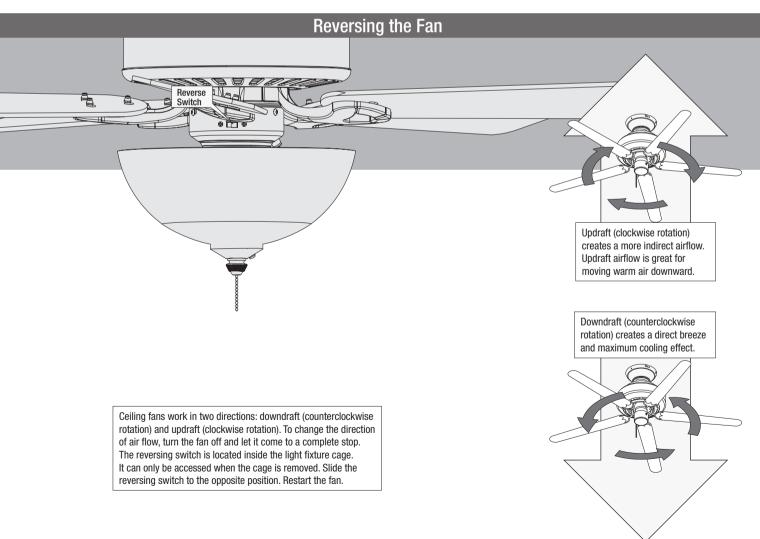

## Troubleshooting Fan Doesn't Work **Excessive Wobbling** Make sure the blades are properly installed on the Make sure power switch is on. blade iron posts. Pull the pull chain to make sure it is on. Turn the power off, support the fan carefully, and Push the motor reversing switch firmly left or right to check that the hanger ball is properly seated. ensure that it is engaged. Use the provided balancing kit and instructions to Check the circuit breaker to ensure the power is halance the fan turned on **Noisy Operation** Make sure the blades spin freely. Turn off power from the circuit breaker, then loosen the canopy and check all the connections according Make sure the blades are properly installed. to the wiring diagram. Check to see if any of the blades are cracked. If so Check the plug connection in the switch housing. replace all of the blades **Hunter Pro Tip:** Cleaning the Fan Use soft brushes or cloths to prevent scratching. Cleaning products may damage the finishes.

## **Limited Lifetime Warranty**

Hunter Fan Company grants this limited warranty to the original purchaser of this Hunter ceiling fan. This document can be found at www.HunterFan.com.

Thank you for choosing Hunter!

#### **How Can Warranty Service Be Obtained?**

**Proof of purchase is required** when requesting warranty service. The original purchaser must present a sales receipt or other document that establishes proof of purchase. Hunter, at its sole discretion, may accept a gift receipt. To obtain service, contact Hunter Fan Company online or by phone.

www.HunterFan.com/Support/Contact-Us/ 1-888-830-1326

Please do not ship your fan or any fan parts to Hunter. Delivery will be refused.

### **What Does This Warranty Cover?**

#### Motor — Limited Lifetime Warranty

If any part of your ceiling fan motor fails during your ownership of the fan due to a defect in material or workmanship, as determined solely by Hunter, Hunter will provide you with a replacement fan free of charge.\* The foregoing limited warranty applies only to the motor itself and does not apply to electronic controls – such as remote control transmitters, remote control receivers, or capacitors – used in conjunction with the motor. Such electronic control items are included in the one-year limited warranty below.

#### Other — One-Year Limited Warranty

Except as otherwise indicated throughout this warranty, if any part of your Hunter ceiling fan fails at any time within one year of the date of purchase due to a defect in material or workmanship, as determined solely by Hunter, Hunter will provide a replacement part free of charge.\*

#### Light Kits — Warranty May Vary

Light kits are included in the one-year limited warranty. However, you may qualify for additional warranty coverage if your fan includes one of the following:

• LED Light Kits — Three-Year Limited Warranty

If your LED light kit module (not including glass components) or LED bulb fails at any time within three years of the date of purchase due to a defect in material or workmanship, as determined solely by Hunter, Hunter will provide a replacement part free of charge.\*

ENERGY STAR® Rated Light Kits — Three-Year Limited Warranty
If your ENERGY STAR rated light kit (not including glass components) fails
at any time within three years of the date of purchase due to a defect in
material or workmanship, as determined solely by Hunter, Hunter will provide
a replacement light kit free of charge.\*

\* If no replacement product/part can be provided for your fan, we will provide a comparable or superior replacement product/part at the sole discretion of Hunter.

#### What Does This Warranty NOT Cover?

Labor Excluded. This warranty does not cover any costs or fees associated with the labor (including electrician's fees) required to install, remove, or replace a fan or any fan parts. There is no warranty for light bulbs (except where otherwise noted); remote control batteries; fans purchased or installed outside the United States; fans owned by someone other than the original purchaser; fans for which proof of purchase has not been established; fans purchased from an unauthorized dealer; ordinary wear and tear; minor cosmetic blemishes; refurbished fans; and fans that are damaged due to any of the following: improper installation, misuse, abuse, improper care, failure to follow Hunter instructions, accidental damage caused by the fan owner or related parties, modifications to the fan, improper or incorrectly performed maintenance or repair, improper voltage supply or power surge, use of improper parts or accessories, failure to provide maintenance to the fan, or acts of God (e.g. flood).

ORIGINAL PURCHASER'S SOLE AND EXCLUSIVE REMEDY FOR A CLAIM OF ANY KIND

WITH RESPECT TO THIS PRODUCT SHALL BE THE REMEDIY FOR A CLAIM OF ANY KIND WITH RESPECT TO THIS PRODUCT SHALL BE THE REMEDIES SET FORTH HEREIN. HUNTER FAN COMPANY IS NOT RESPONSIBLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, DUE TO PRODUCT FAILURE, WHETHER ARISING OUT OF BREACH OF WARRANTY, BREACH OF CONTRACT, OR OTHERWISE. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE APPLICABLE TO THIS PRODUCT ARE LIMITED IN DURATION TO THE PERIOD OF COVERAGE OF THE APPLICABLE LIMITED WARRANTIES SET FORTH ABOVE. Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

#### **How Does State Law Affect Warranty Coverage?**

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.