
























CROSLEY

FURNITURE



Kitchen Cart CF3046












PART LIST

A 	B 	C 	D 	E 
Large Top Panel 1 PC	Small Top Panel 1 PC	Left Panel 1 PC	Right Panel 1 PC	Left Partition Panel 1 PC
F 	G 	H 	I 	J 
Right Partition Panel 1 PC	Bottom Panel 1 PC	Fixed Shelf Panel 1 PC	Adjustable Shelf 2 PCS	Drawer Front Panel 1 PC
K 	L 	M 	N 	O 
Drawer Left Panel 1 PC	Drawer Right Panel 1 PC	Drawer Back Panel 1 PC	Drawer Bottom Panel 1 PC	Center Back Panel 1 PC
P 	Q 	R 	S 	T 
Side Back Panel 2 PCS	Left Door 1 PC	Right Door 1 PC	Locking Caster 2 PCS	Caster 3 PCS
U 	V 	W 	X 	Y 
Support Rail 2 PCS	Slipper Guide 2 PCS	Left Inner Slide 1 PC	Right Inner Slide 1 PC	Left Outer Slide 1 PC

PART LIST


Z 	ZA 
Right Outer Slide	Towel Bar
1 PC	1 PC

HARDWARE LIST

#1  Ø3*12mm Short Screw 12 PCS (Extra 1)	#2  Ø3*15mm Medium Screw 16 PCS (Extra 1)	#3  Ø3*30mm Long Screw 4 PCS (Extra 1)	#4  Ø3.5*15mm Large Medium Screw 18 PCS (Extra 1)	#5  Ø4.5*12mm Large Short Screw 20 PCS (Extra 1)
#6  M4*22mm Round Head Bolt 6 PCS (Extra 1)	#7  Ø6*10*13mm Shelf Holder 8 PCS (Extra 1)	#8  Ø1/4"*10mm Bolt 8 PCS (Extra 1)	#9  Ø5*40mm Tapping Screw 10 PCS (Extra 1)	#10  Ø8*30mm Wood Dowel 22 PCS (Extra 1)
#11  Ø6*35mm Cam Bolt 18 PCS (Extra 1)	#12  Ø15*9mm Cam Lock 18 PCS (Extra 1)	#13  150*32*12mm Handle 3 PCS	#14  Top Hinge 3 PCS	#15  Ø20mm Cam Sticker 18 PCS (Extra 1)
#16  4mm Allen Wrench 1 PC	#17  45*17*12mm Magnet 2 PCS	#18  14*10mm Back Bracket 12 PCS (Extra 1)	#19  M5*25mm Bolt 2 PCS (Extra 1)	

ADDITIONAL TOOLS (Not Provided)



Note: It is not recommended to use power tools during assembly.



Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

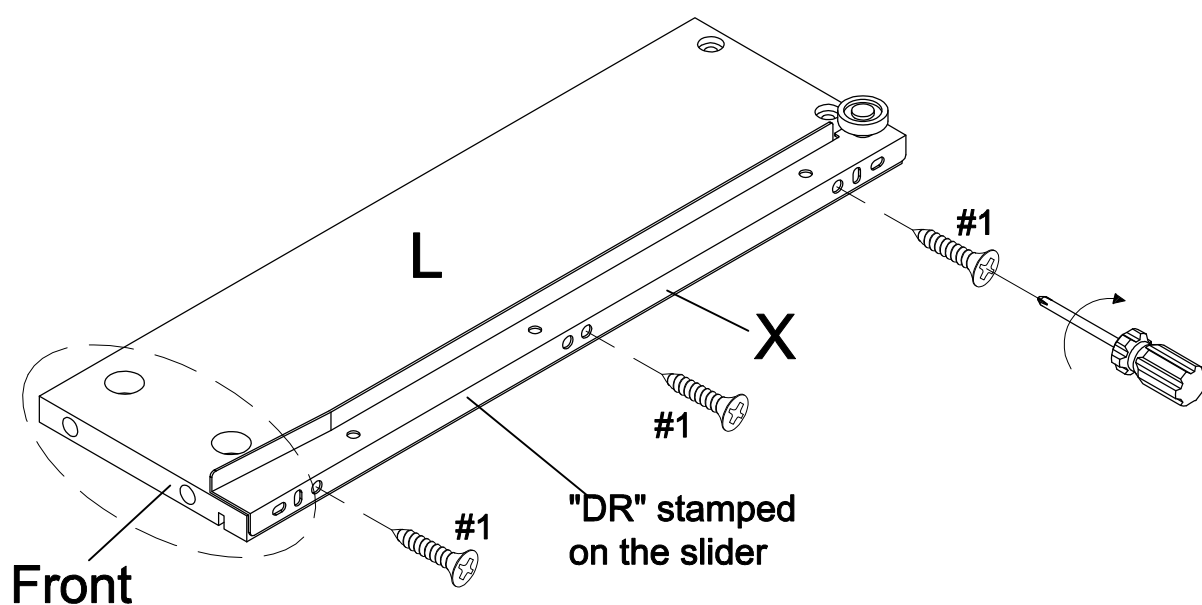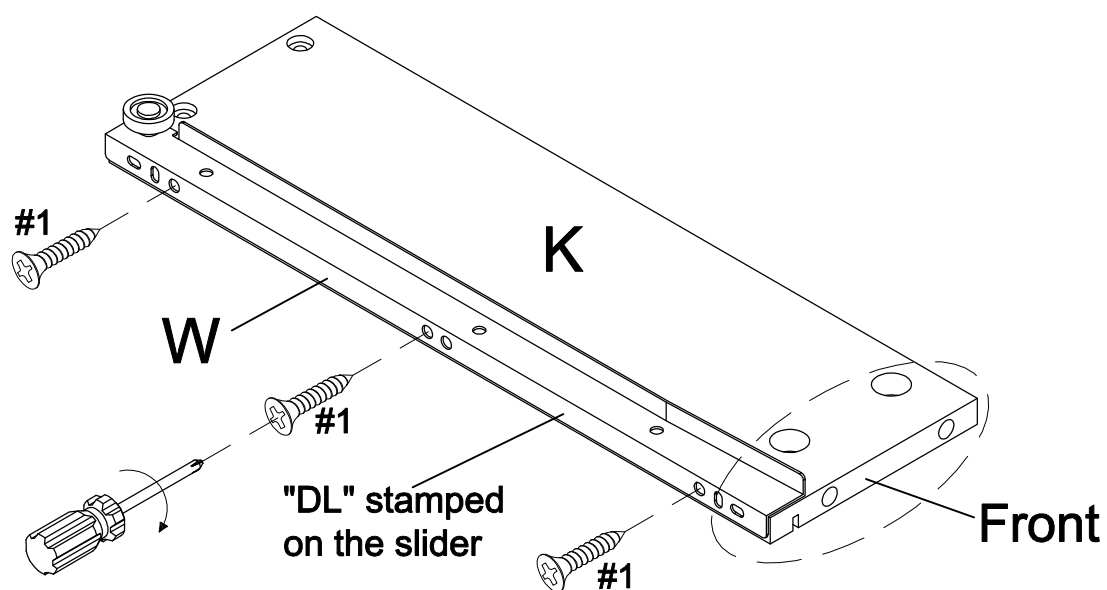Step 1. Attach left inner slide (part W) and right inner slide (part X) to drawer left panel (part K) and drawer right panel (part L) using short screws (part #1) and phillips head screwdriver.



#1  x 6

Step 2.

(1) Screw cam bolts (part #11) into drawer front panel (part J) using phillips head screwdriver.

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

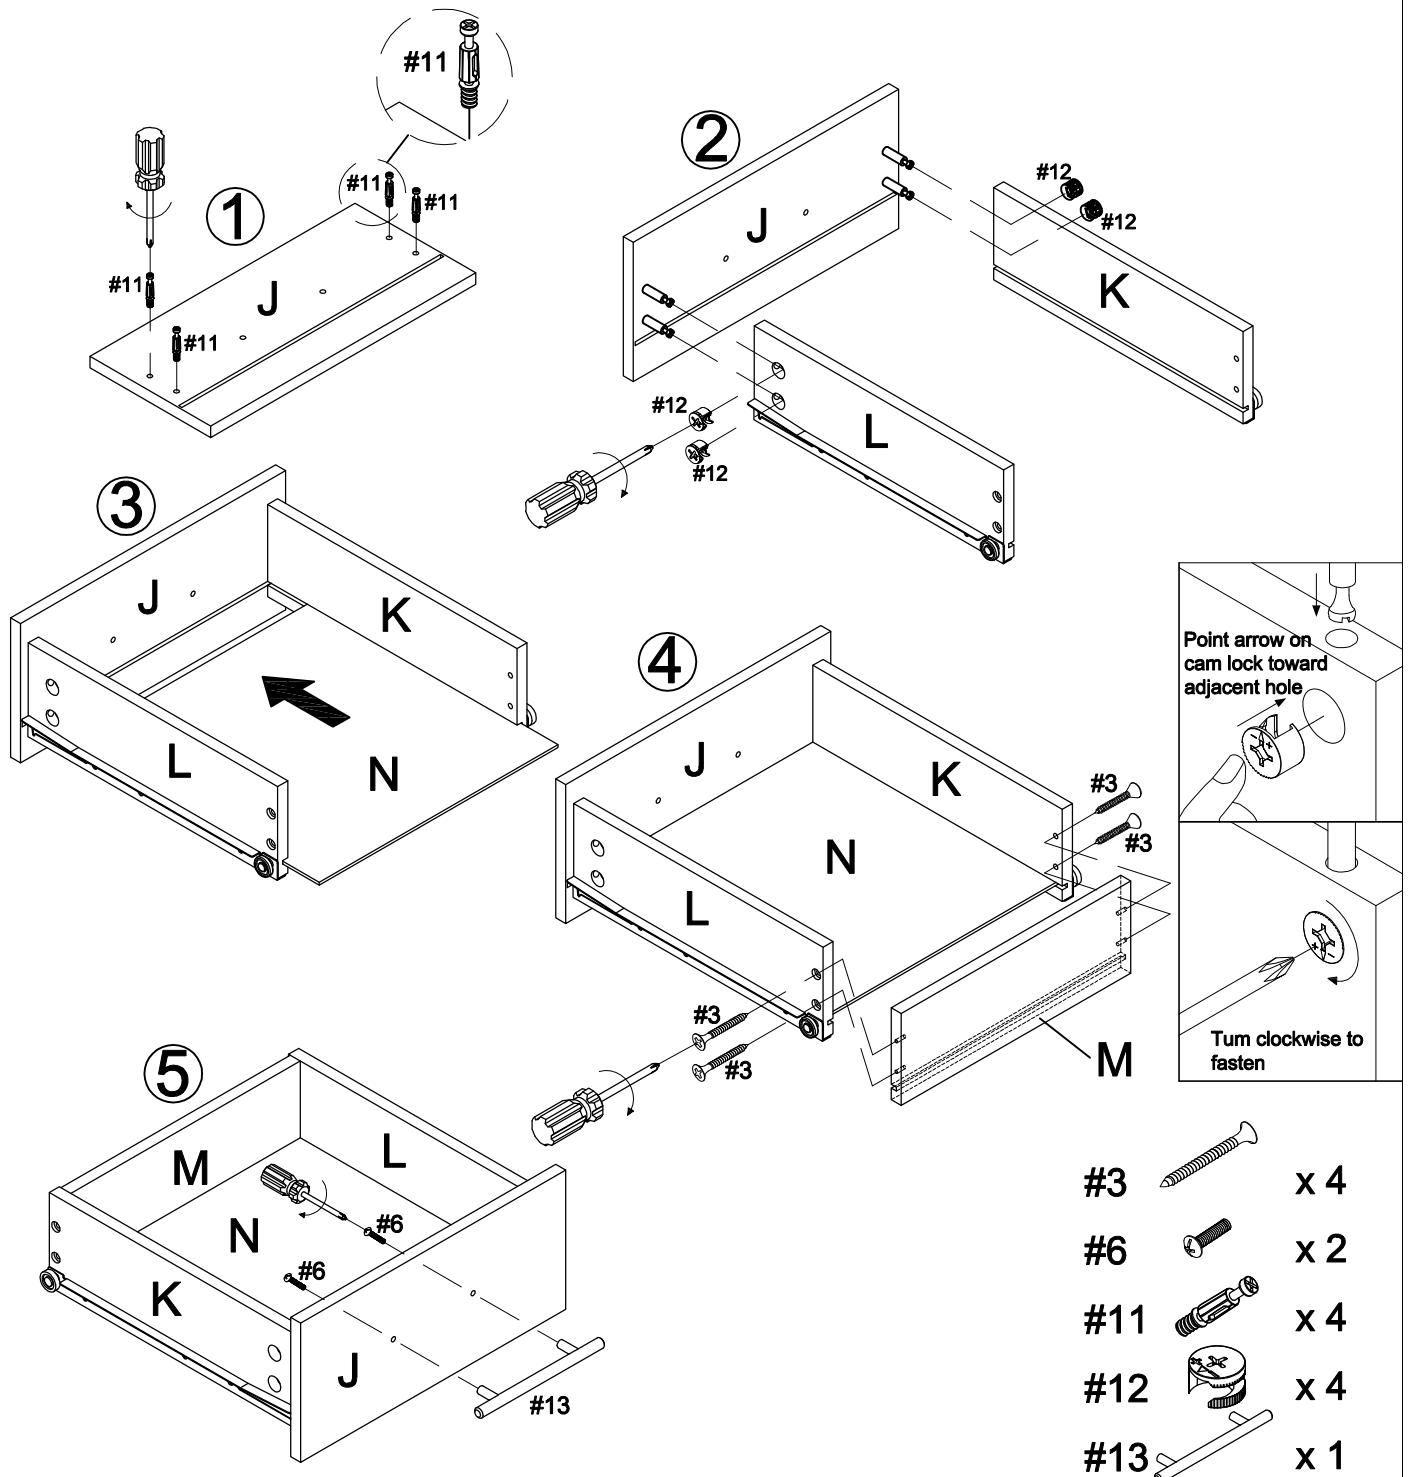
(2) Attach panels (parts K & L) to drawer front panel (part J) using cam locks (part #12) and phillips head screwdriver.

Note: Cam locks must rotate a full 180°. See pictured insert.

(3) Slide drawer bottom panel (part N) into grooves of panels (parts J, K & L).

(4) Attach drawer back panel (part M) to panels (parts K, L & N) using long screws (part #3) and phillips head screwdriver.


(5) Attach handle (part #13) to drawer front panel (part J) using round head bolts (part #6) and phillips head screwdriver.



Step 3. Attach left outer slide (part Y) and right outer slide (part Z) to left partition panel (part E) and right partition panel (part F) using short screws (part #1) and phillips head screwdriver.


Screw cam bolts (part #11) into panels (parts E & F) using phillips head screwdriver.

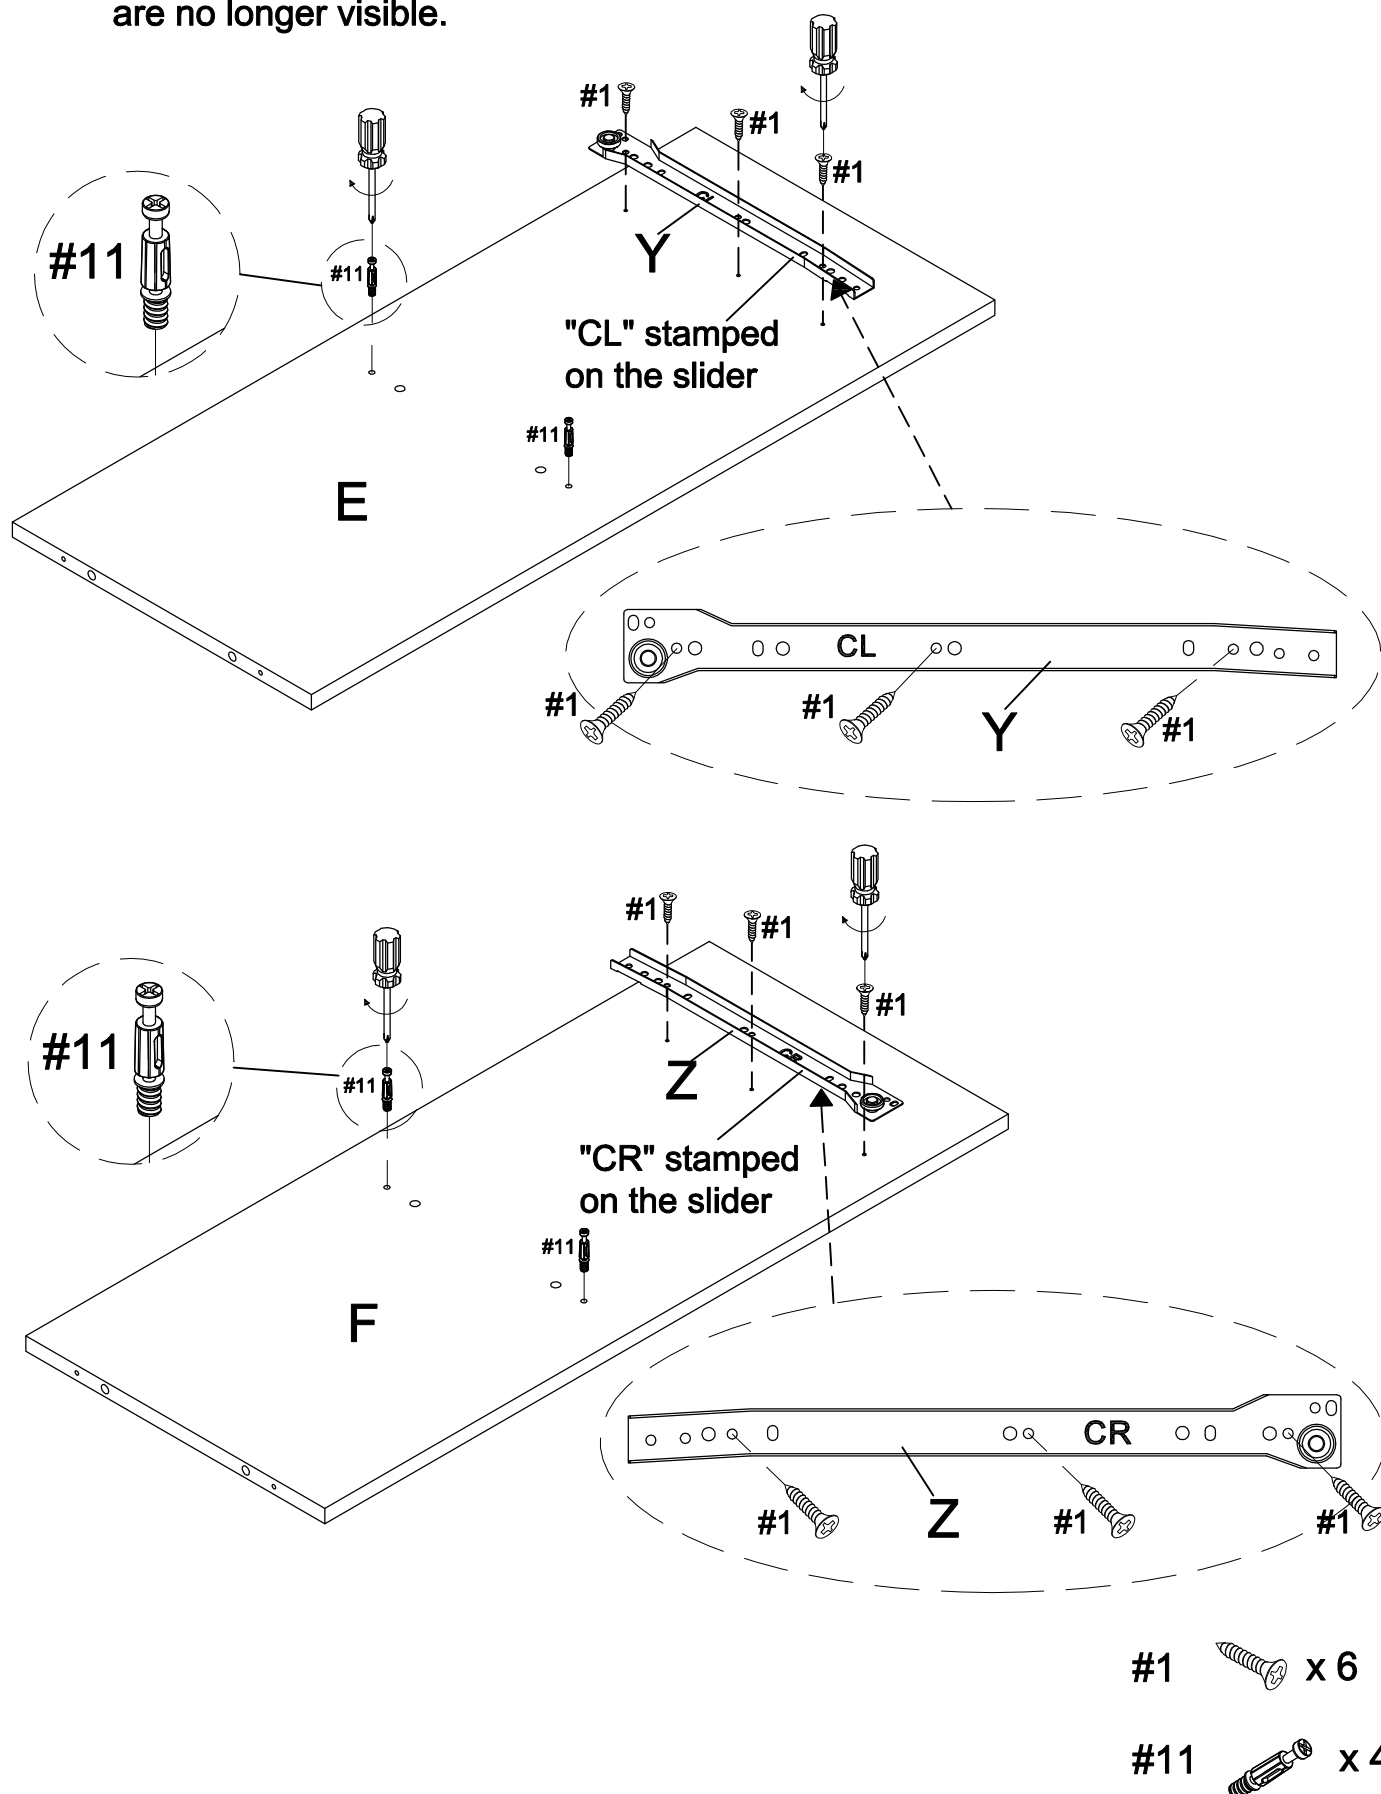Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.




Step 4. Connect large top panel (part A) to small top panel (part B) using top hinges (part #14), large medium screws (part #4) and phillips head screwdriver. Attach magnets (part #17) to large top panel (part A) using medium screws (part #2) and phillips head screwdriver.

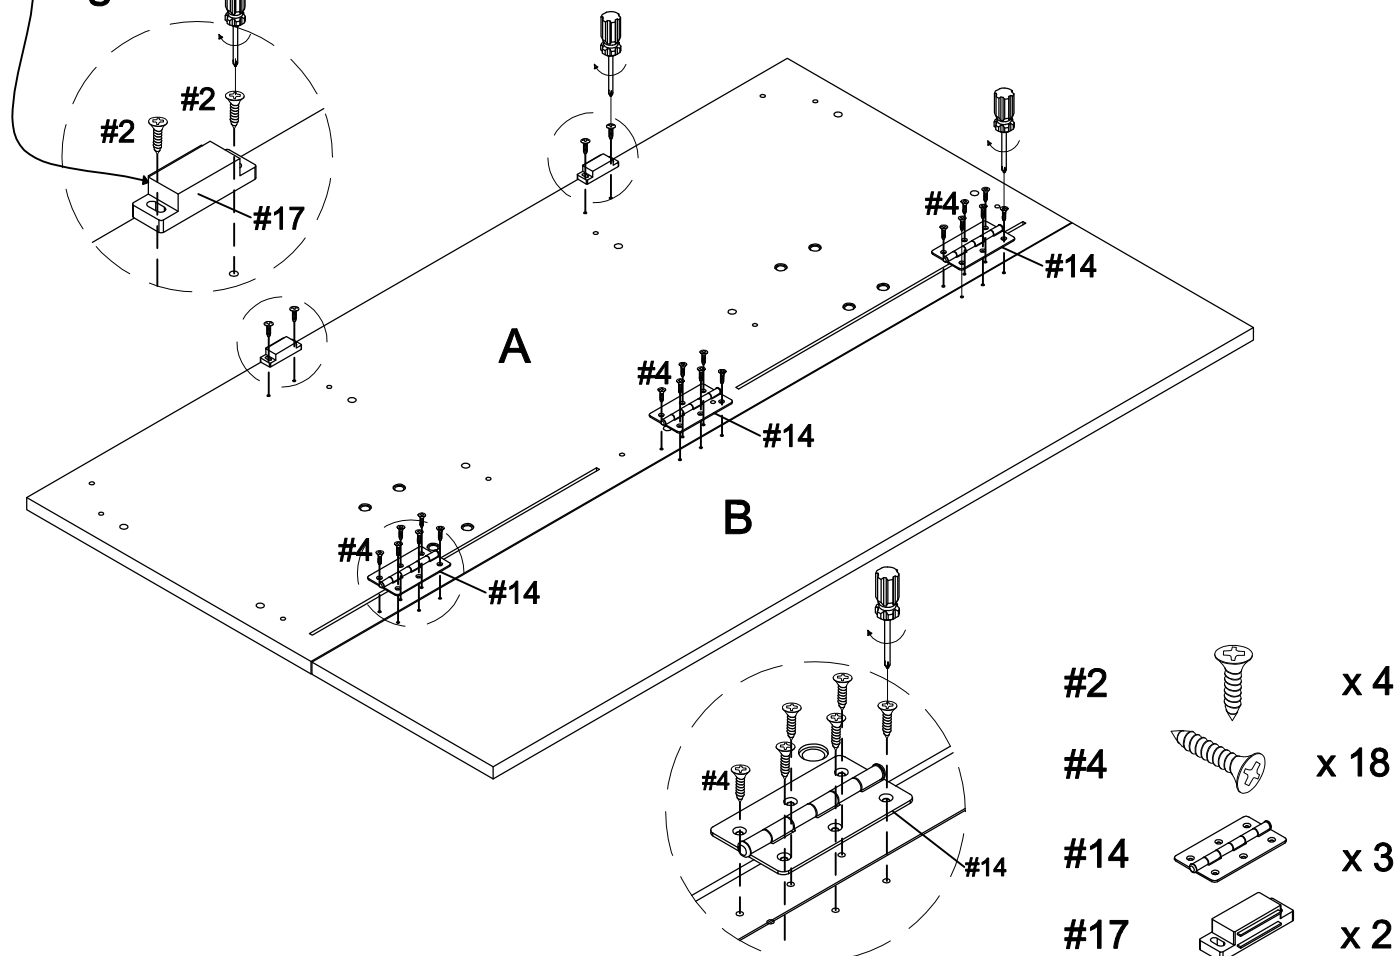Magnet in front




Step 5. Attach support rail (part U) to slipper guide (part V).

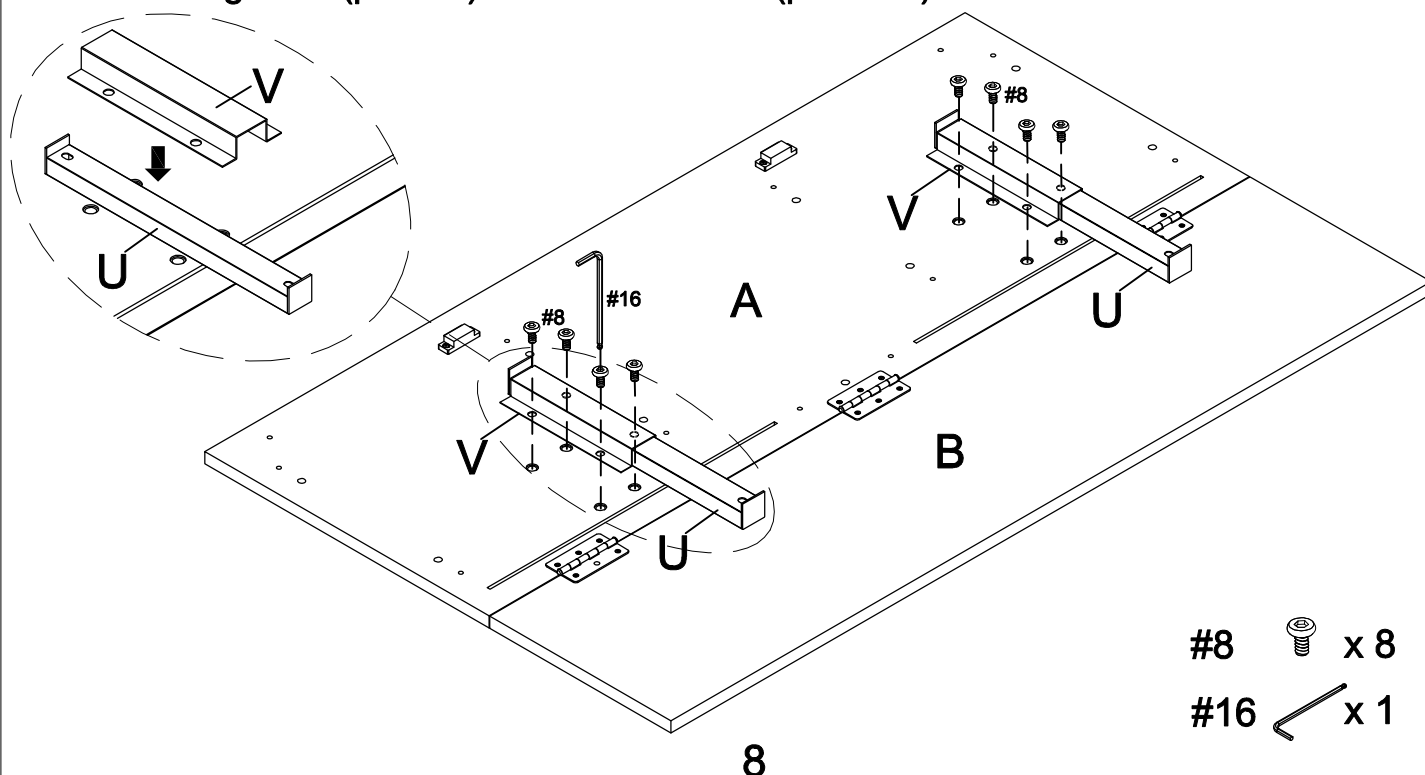Attach slipper guide (part V) with support rail (part U) to large top panel (part A) using bolts (part #8) and allen wrench (part #16).



Step 6. Screw cam bolts (part #11) into large top panel (part A) using phillips head screwdriver.


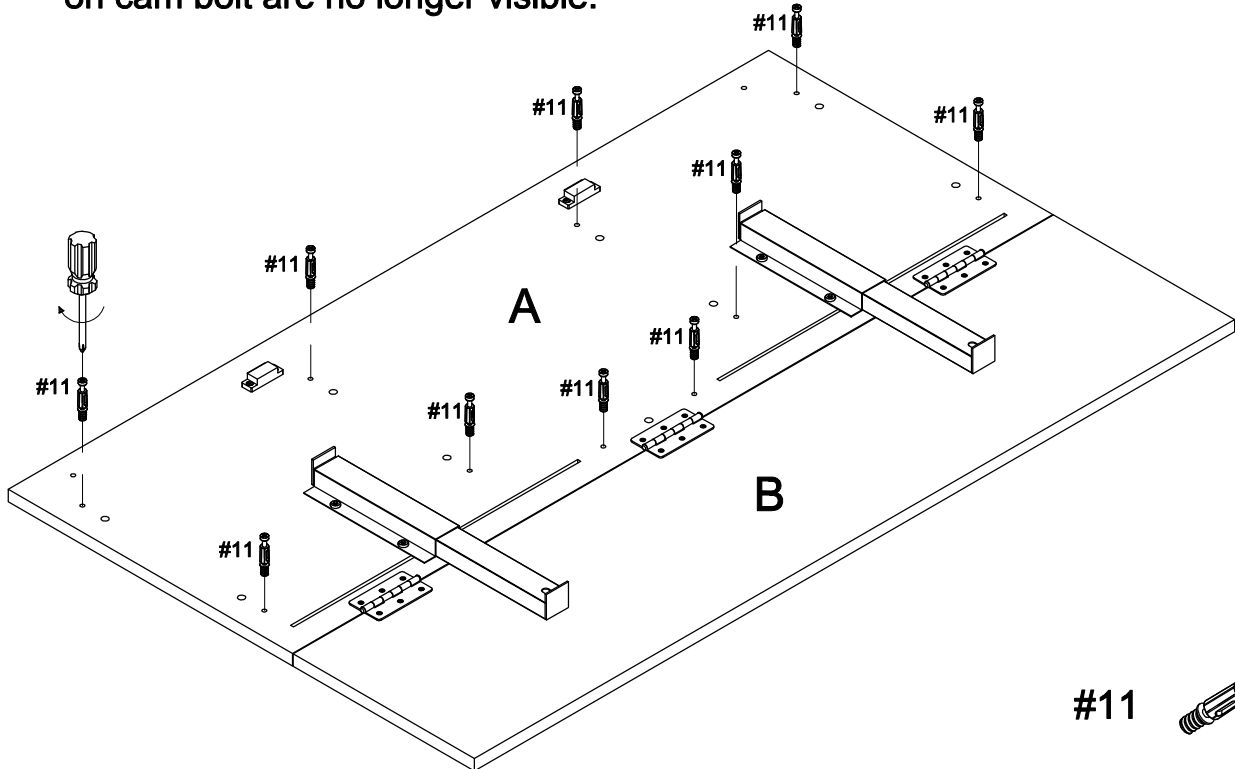
Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.



#11  x 10


Step 7. Attach left partition panel (part E) and right partition panel (part F) to fixed shelf panel (part H) using wood dowels (part #10), cam locks (part #12) and phillips head screwdriver.

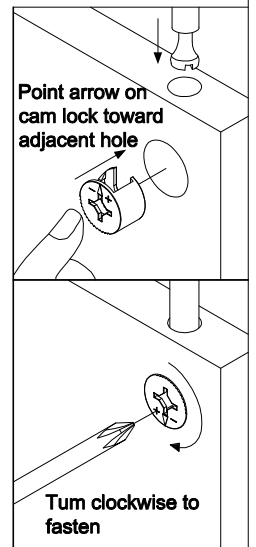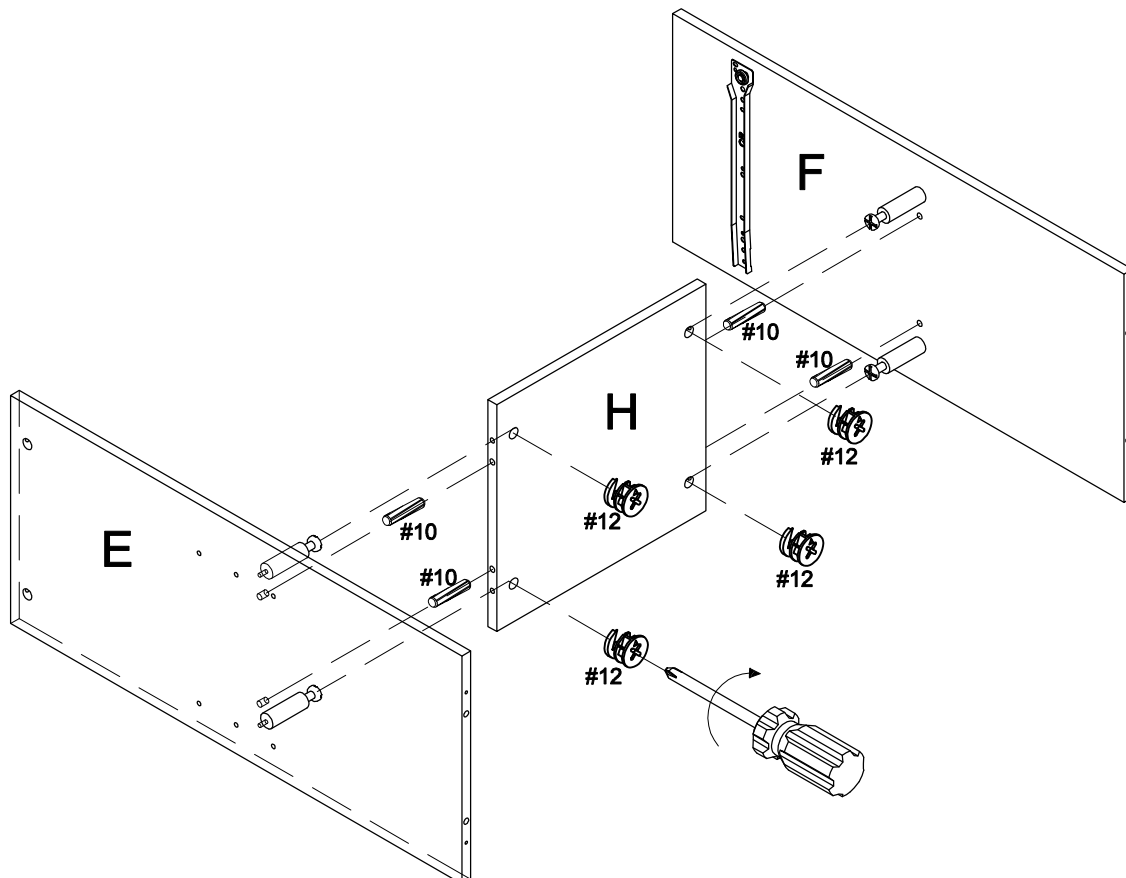Note: Cam locks must rotate a full 180°. See pictured insert.




#10  x 4
#12  x 4

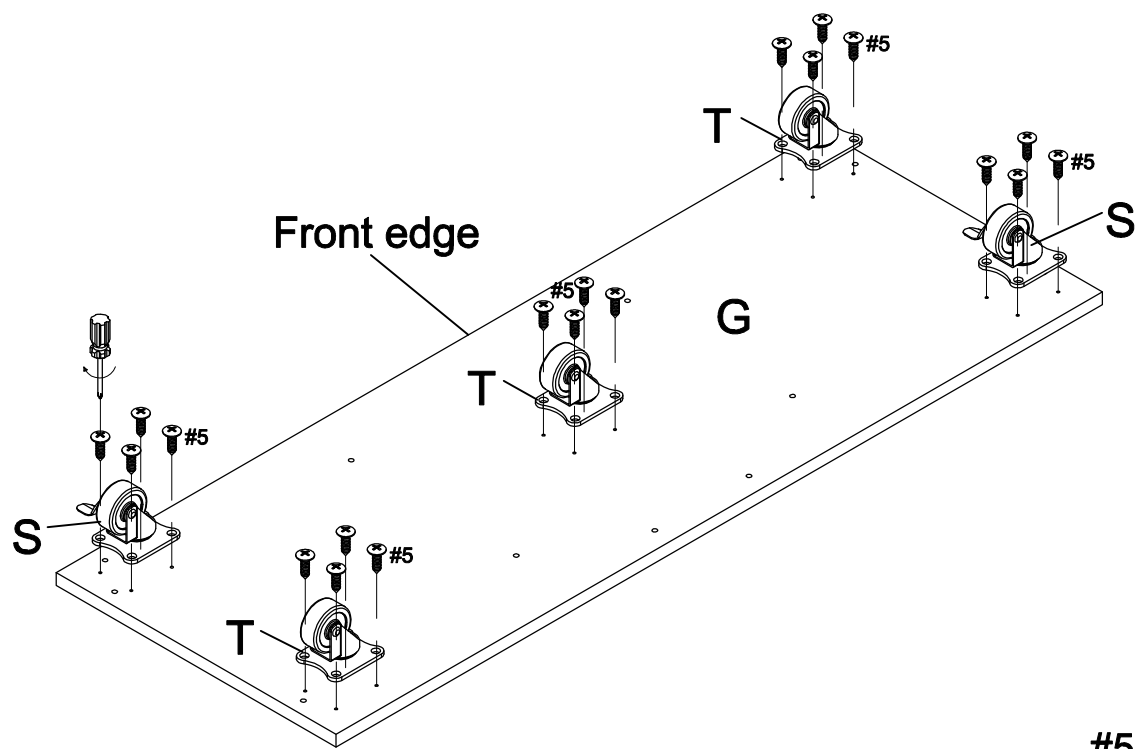Step 8. Attach locking casters (part S) and casters (part T) to bottom panel (part G) using large short screws (part #5) and phillips head screwdriver.




#5  x 20

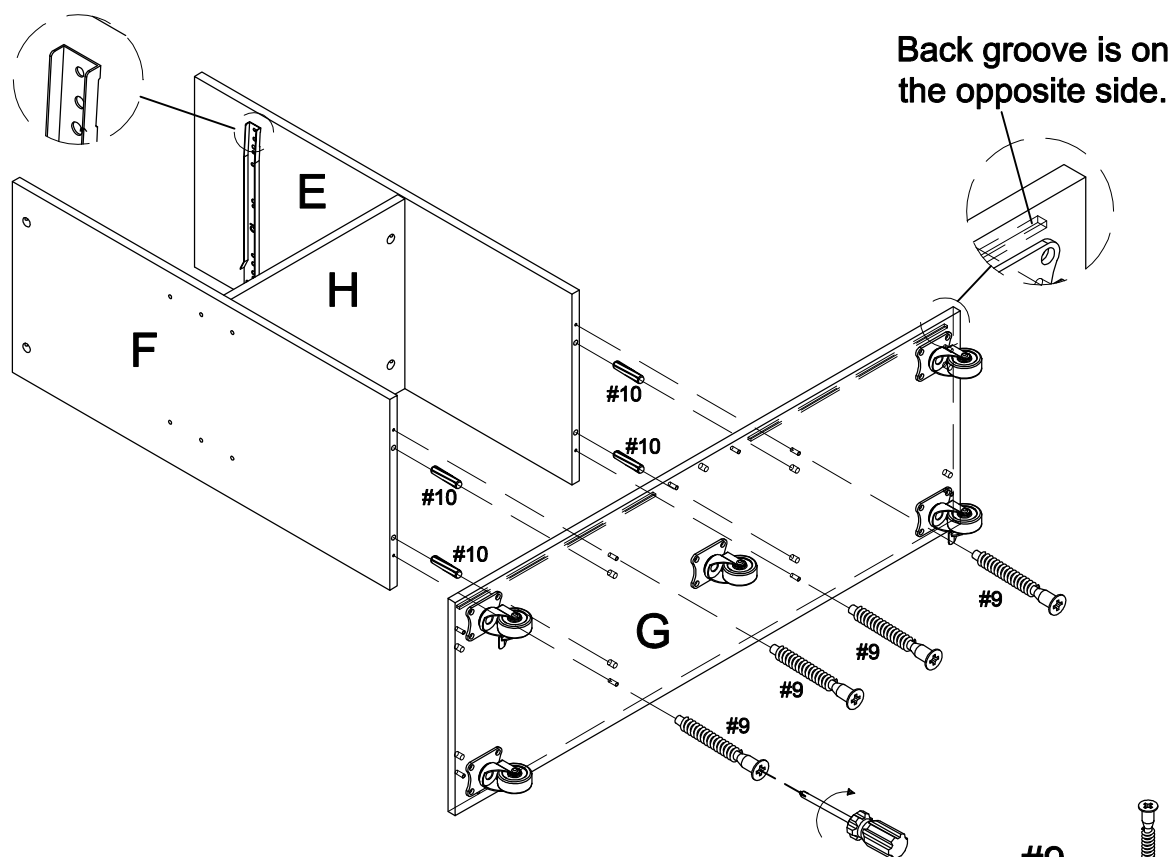Step 9. Attach bottom panel (part G) to assembled unit (parts E & F) using wood dowels (part #10), tapping screws (part #9) and phillips head screwdriver.




#9  x 4
#10  x 4

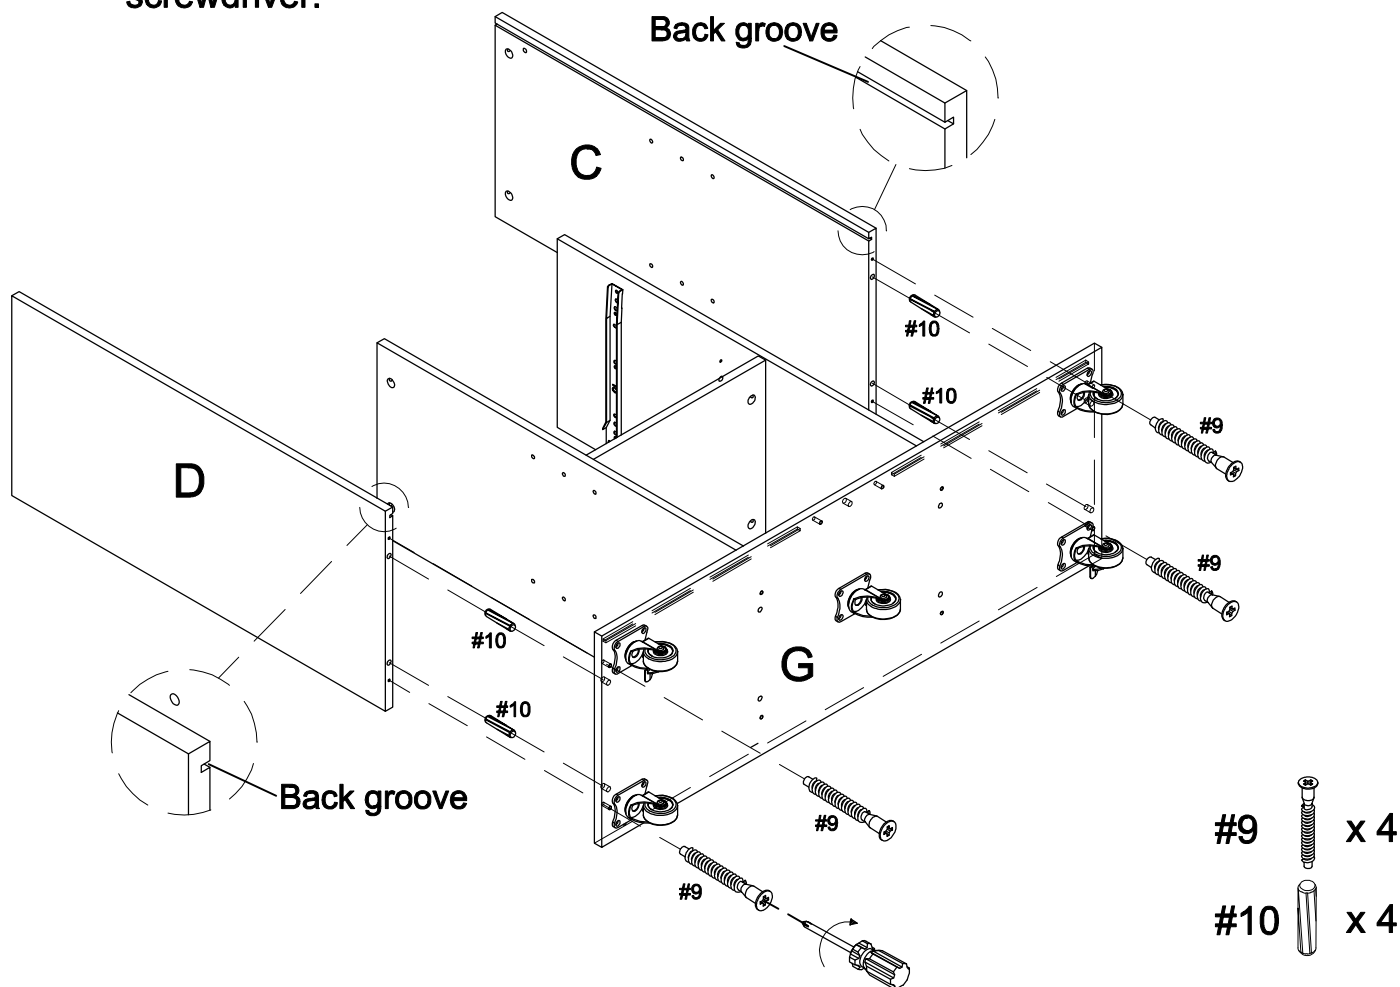
Step 10. Attach left panel (part C) and right panel (part D) to bottom panel (part G) using wood dowels (part #10), tapping screws (part #9) and phillips head screwdriver.



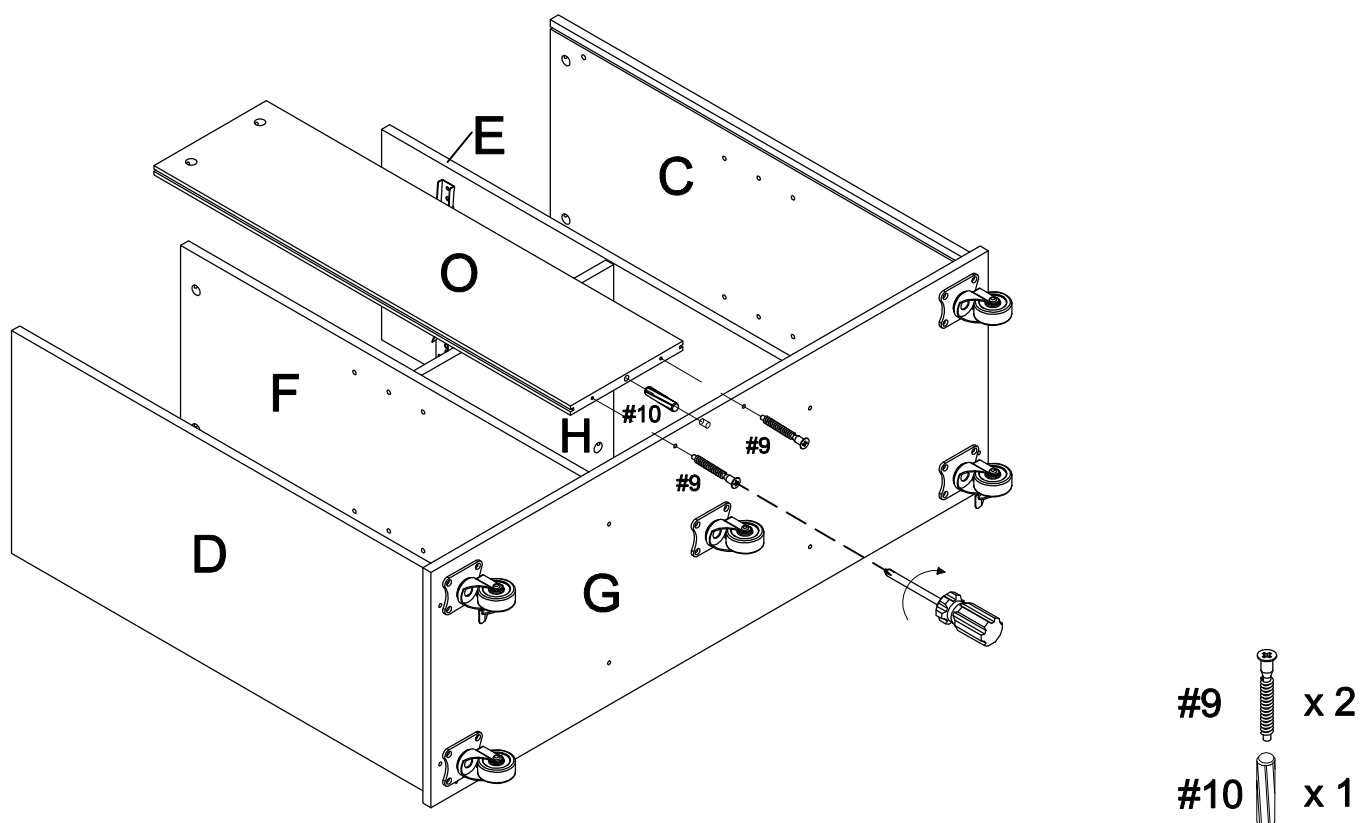
Step 11. Attach center back panel (part O) to bottom panel (part G) using wood dowel (part #10), tapping screws (part #9) and phillips head screwdriver.



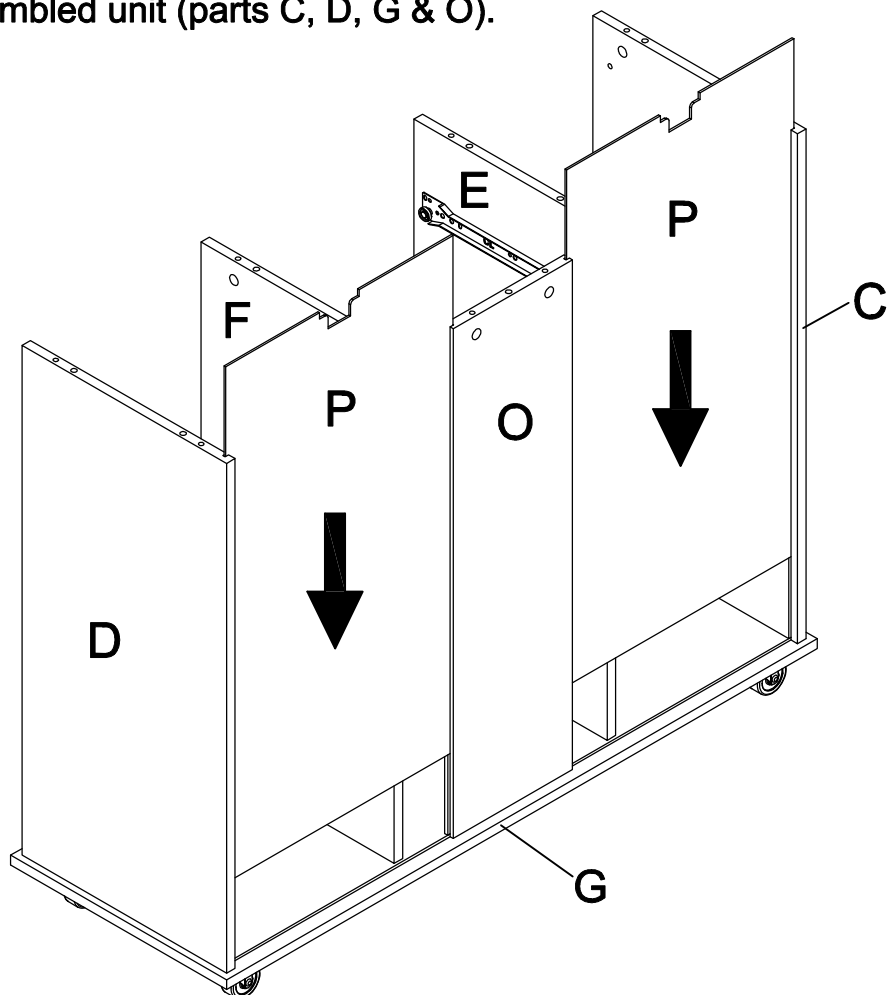Step 12. Carefully turn unit upright. Insert side back panels (part P) into grooves of assembled unit (parts C, D, G & O).




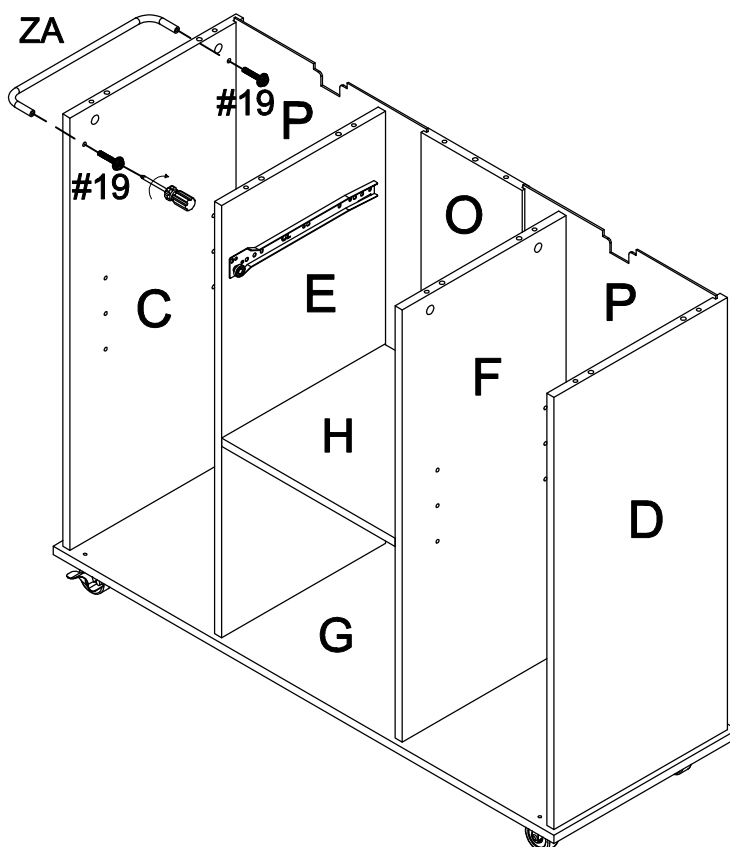
Step 13. Attach towel bar (part ZA) to left panel (part C) using bolts (part #19) and phillips head screwdriver.



#19  x 2


Step 14. Attach assembled unit (parts A & B) to assembled unit (parts C, D, E, F, O & P) using wood dowels (part #10), cam locks (part #12) and phillips head screwdriver.

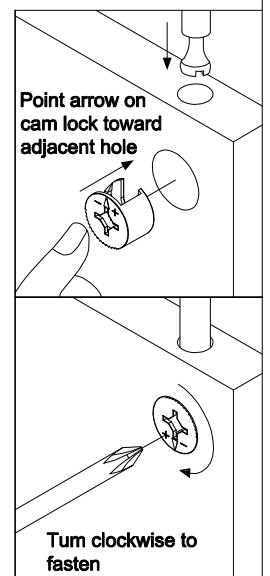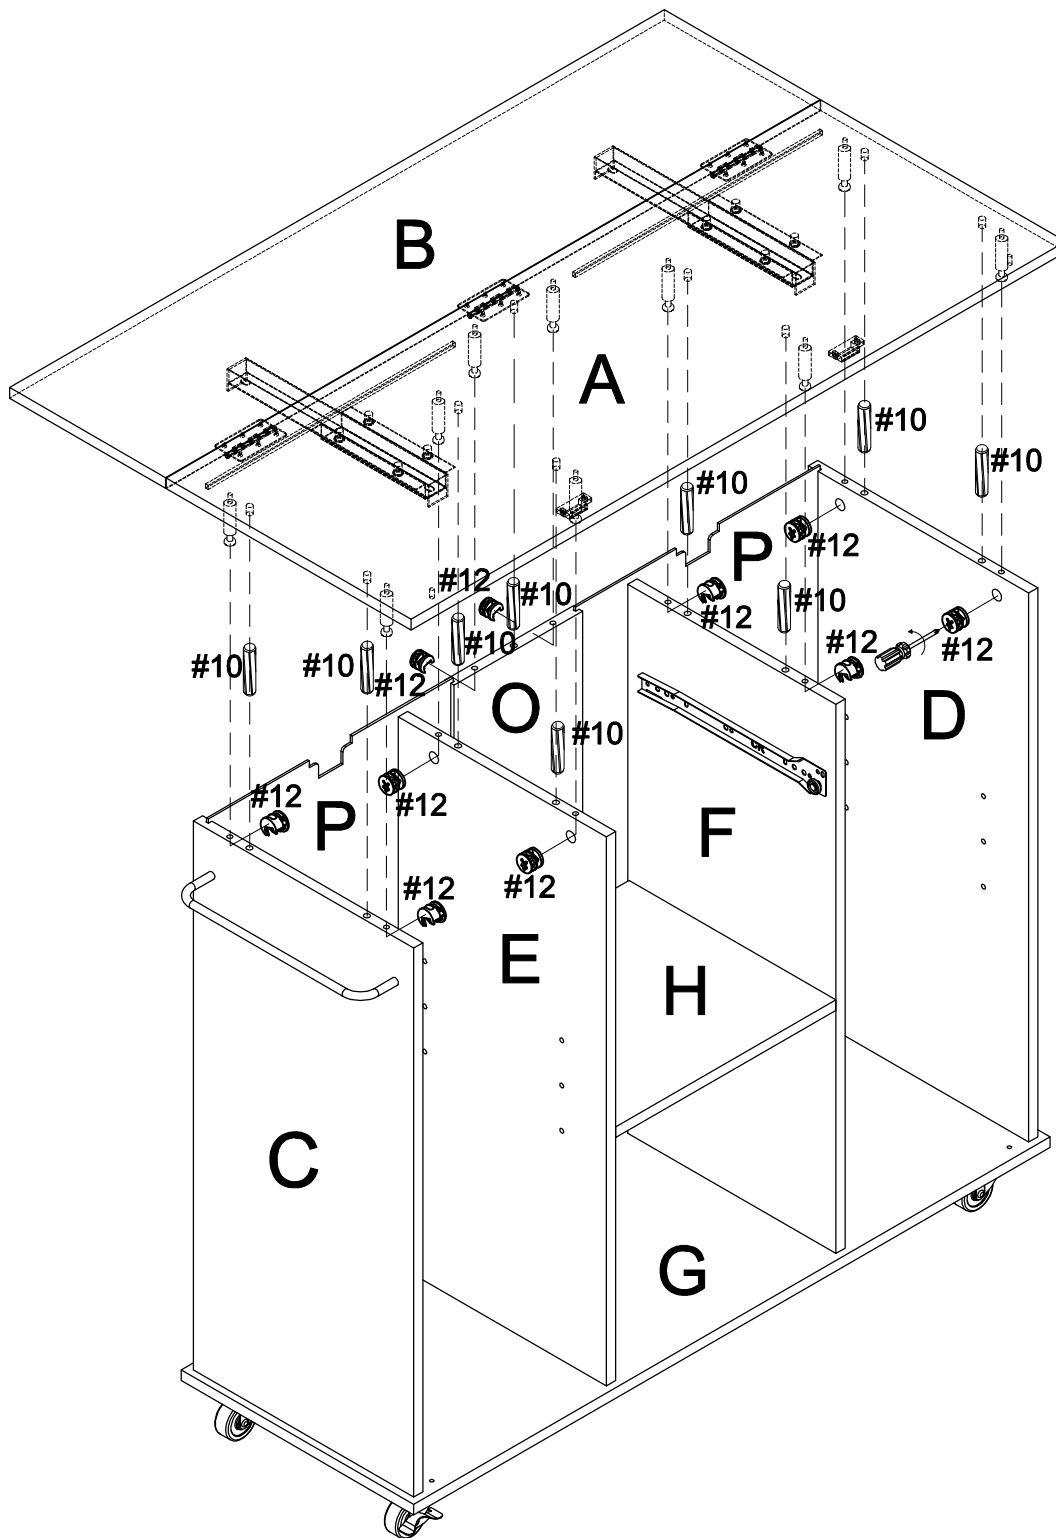Note: Cam locks must rotate a full 180°. See pictured insert.




#10  x 9
#12  x 10

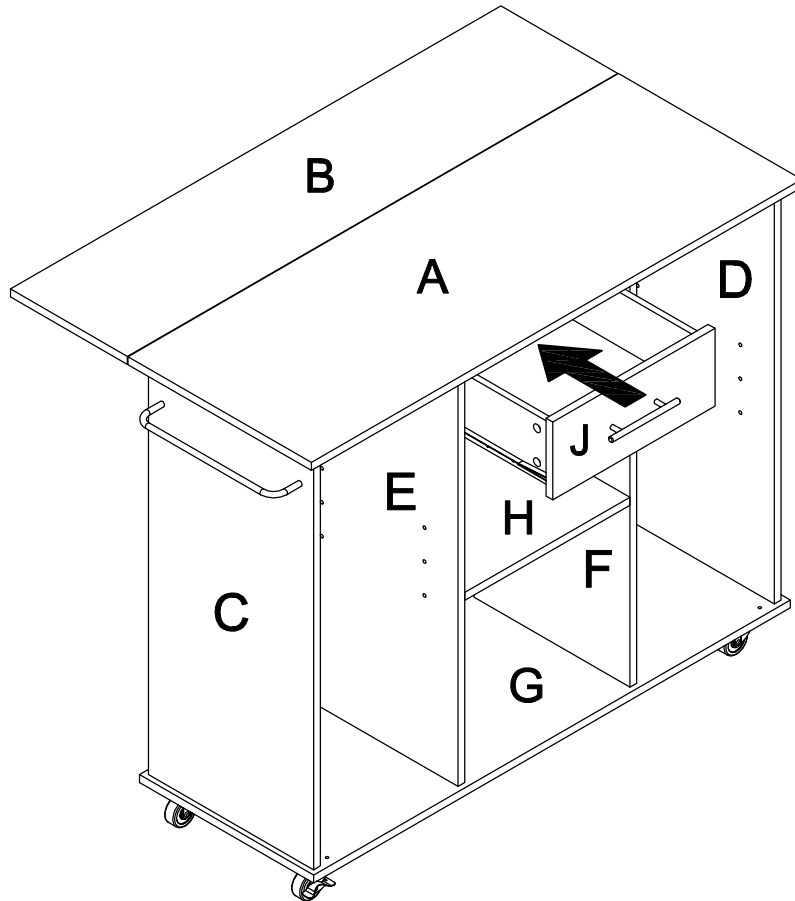Step 15. Slide assembled drawer into place.




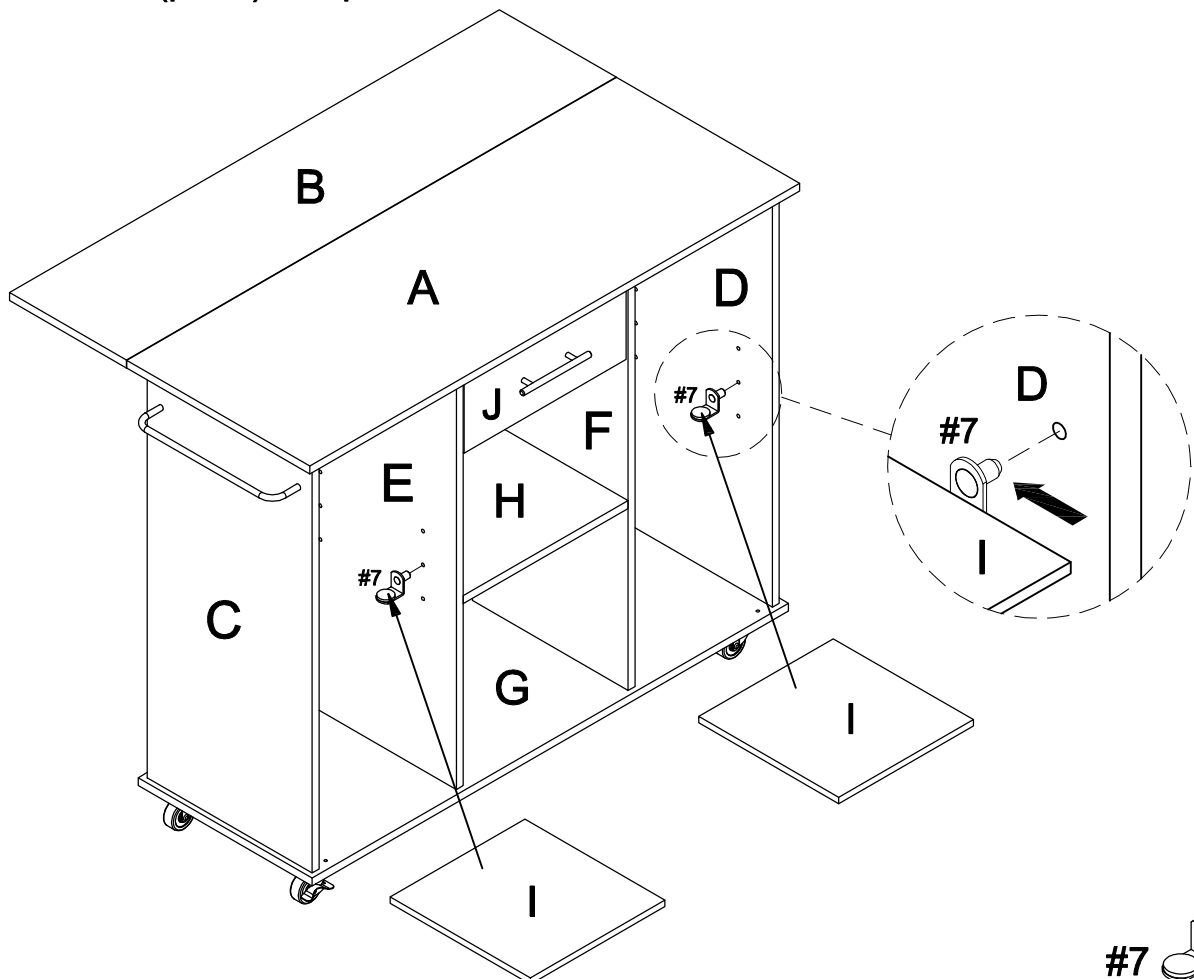Step 16. Insert shelf holders (part #7) into desired position and slide adjustable shelves (part I) into place.






#7  x 8

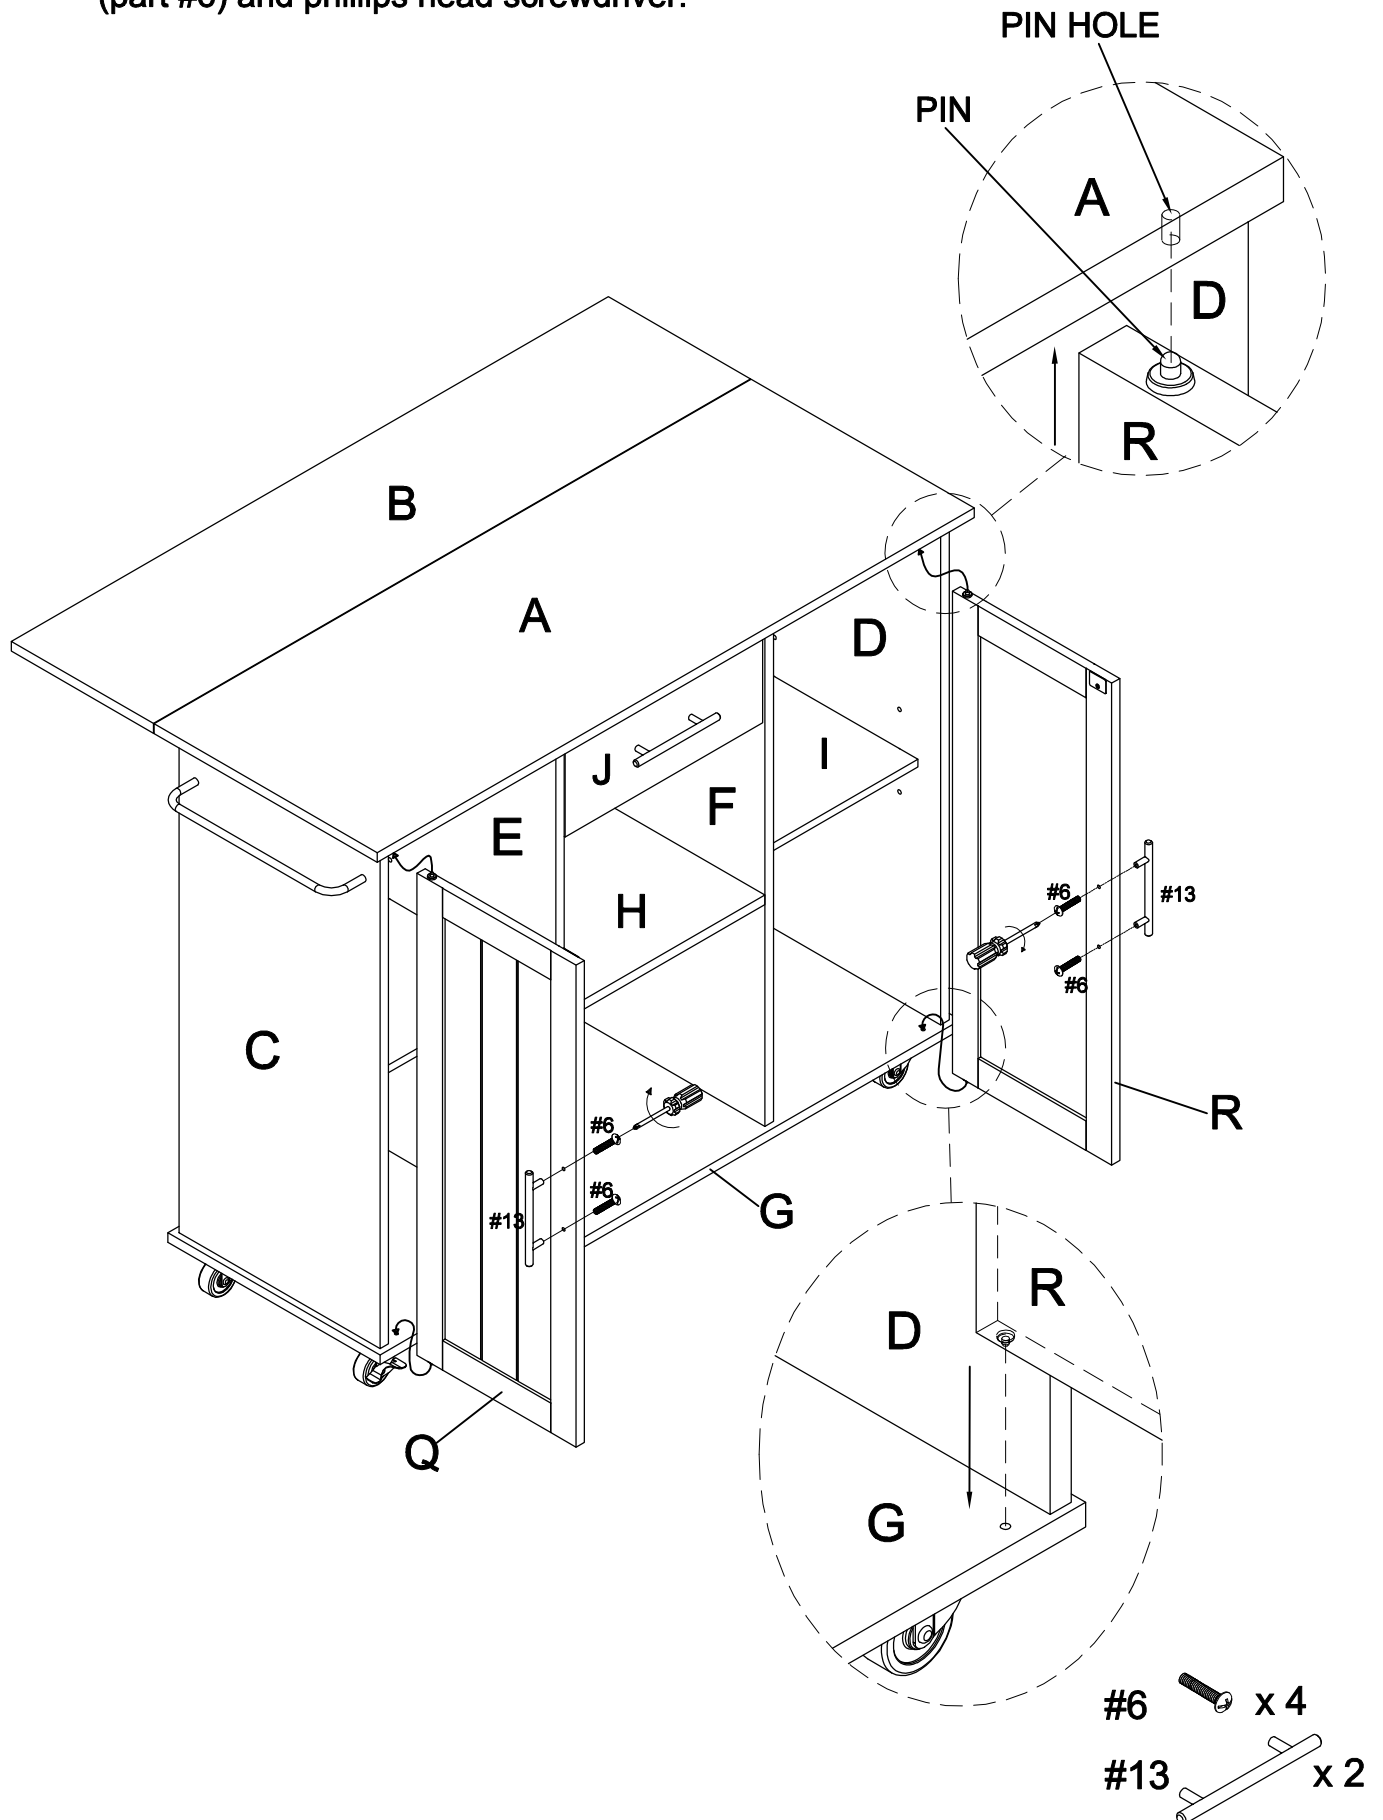Step 17. Attach doors (parts Q & R) by placing pin hinges (pre-installed in door) in the pre-drilled hole of bottom panel (part G). Then depress the top spring-loaded pin hinge so it can be placed in the pre-drilled hole of large top panel (part A). Note: Be sure top and bottom pin hinges are fully extended to secure doors in place. Attach handles (part #13) to doors (parts Q & R) using round head bolts (part #6) and phillips head screwdriver.




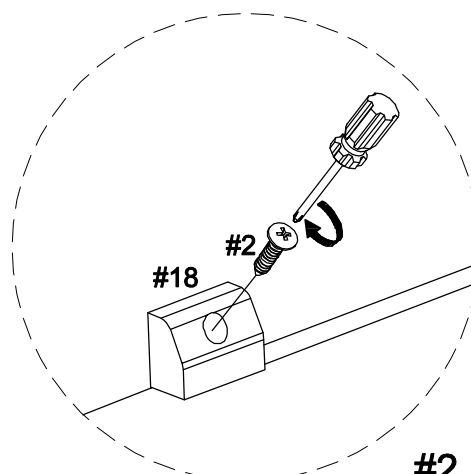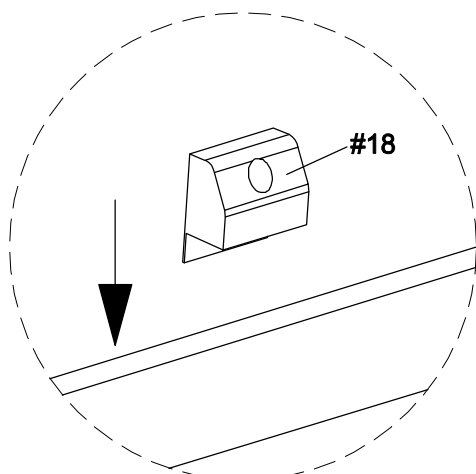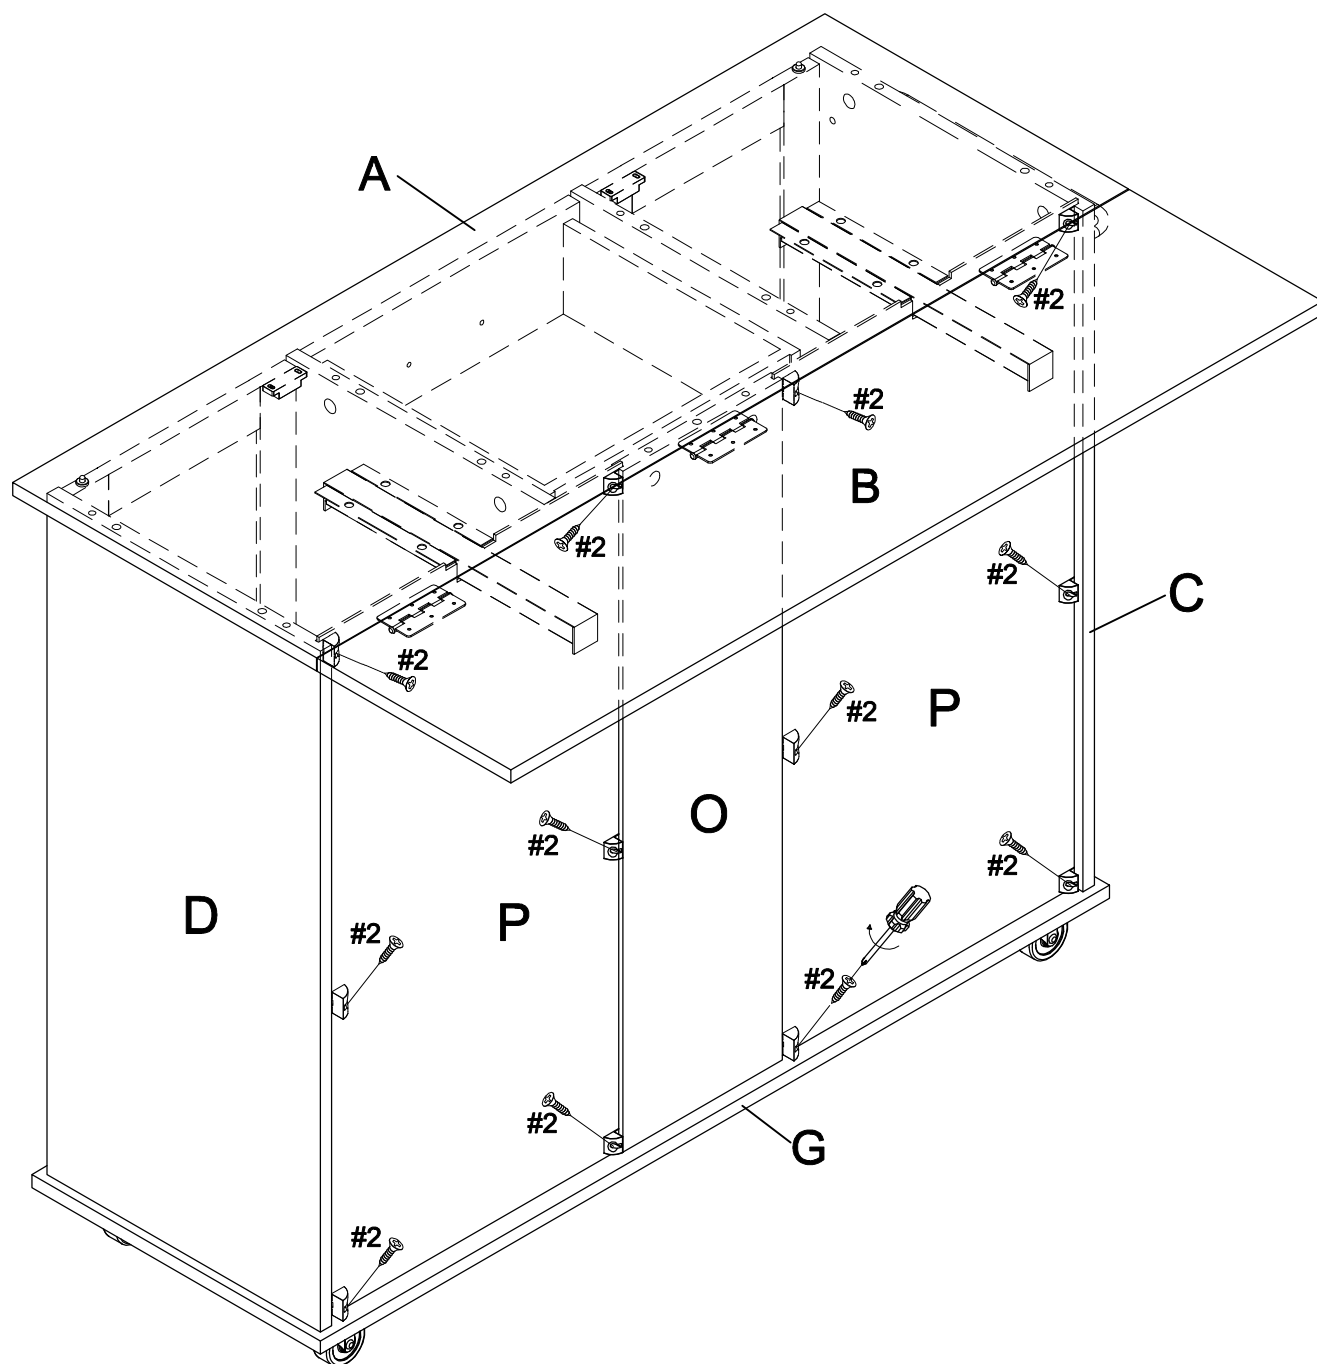Step 18. Secure back brackets (part #18) at the corner of back panels (parts O & P) using medium screws (part #2) and phillips head screwdriver.



#2  x 12
#18  x 12

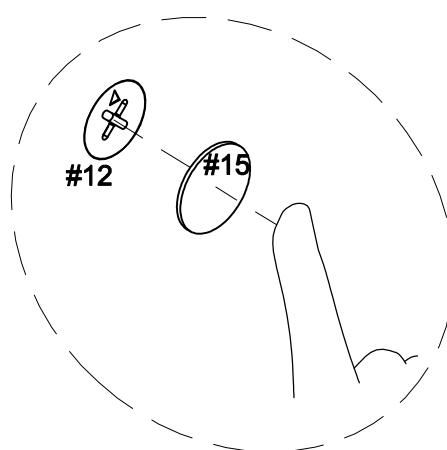Step 19. Using cam stickers (part #15) cover all cam locks (part #12).



#15  x 18